


Druckverlust **VARIO** Ø 50 PN20 doppel-U (2 Kreise parallel)
mit Ethylenglykol 25% @ 0°C



Druckverlust pro Sonde doppel-U in kPa

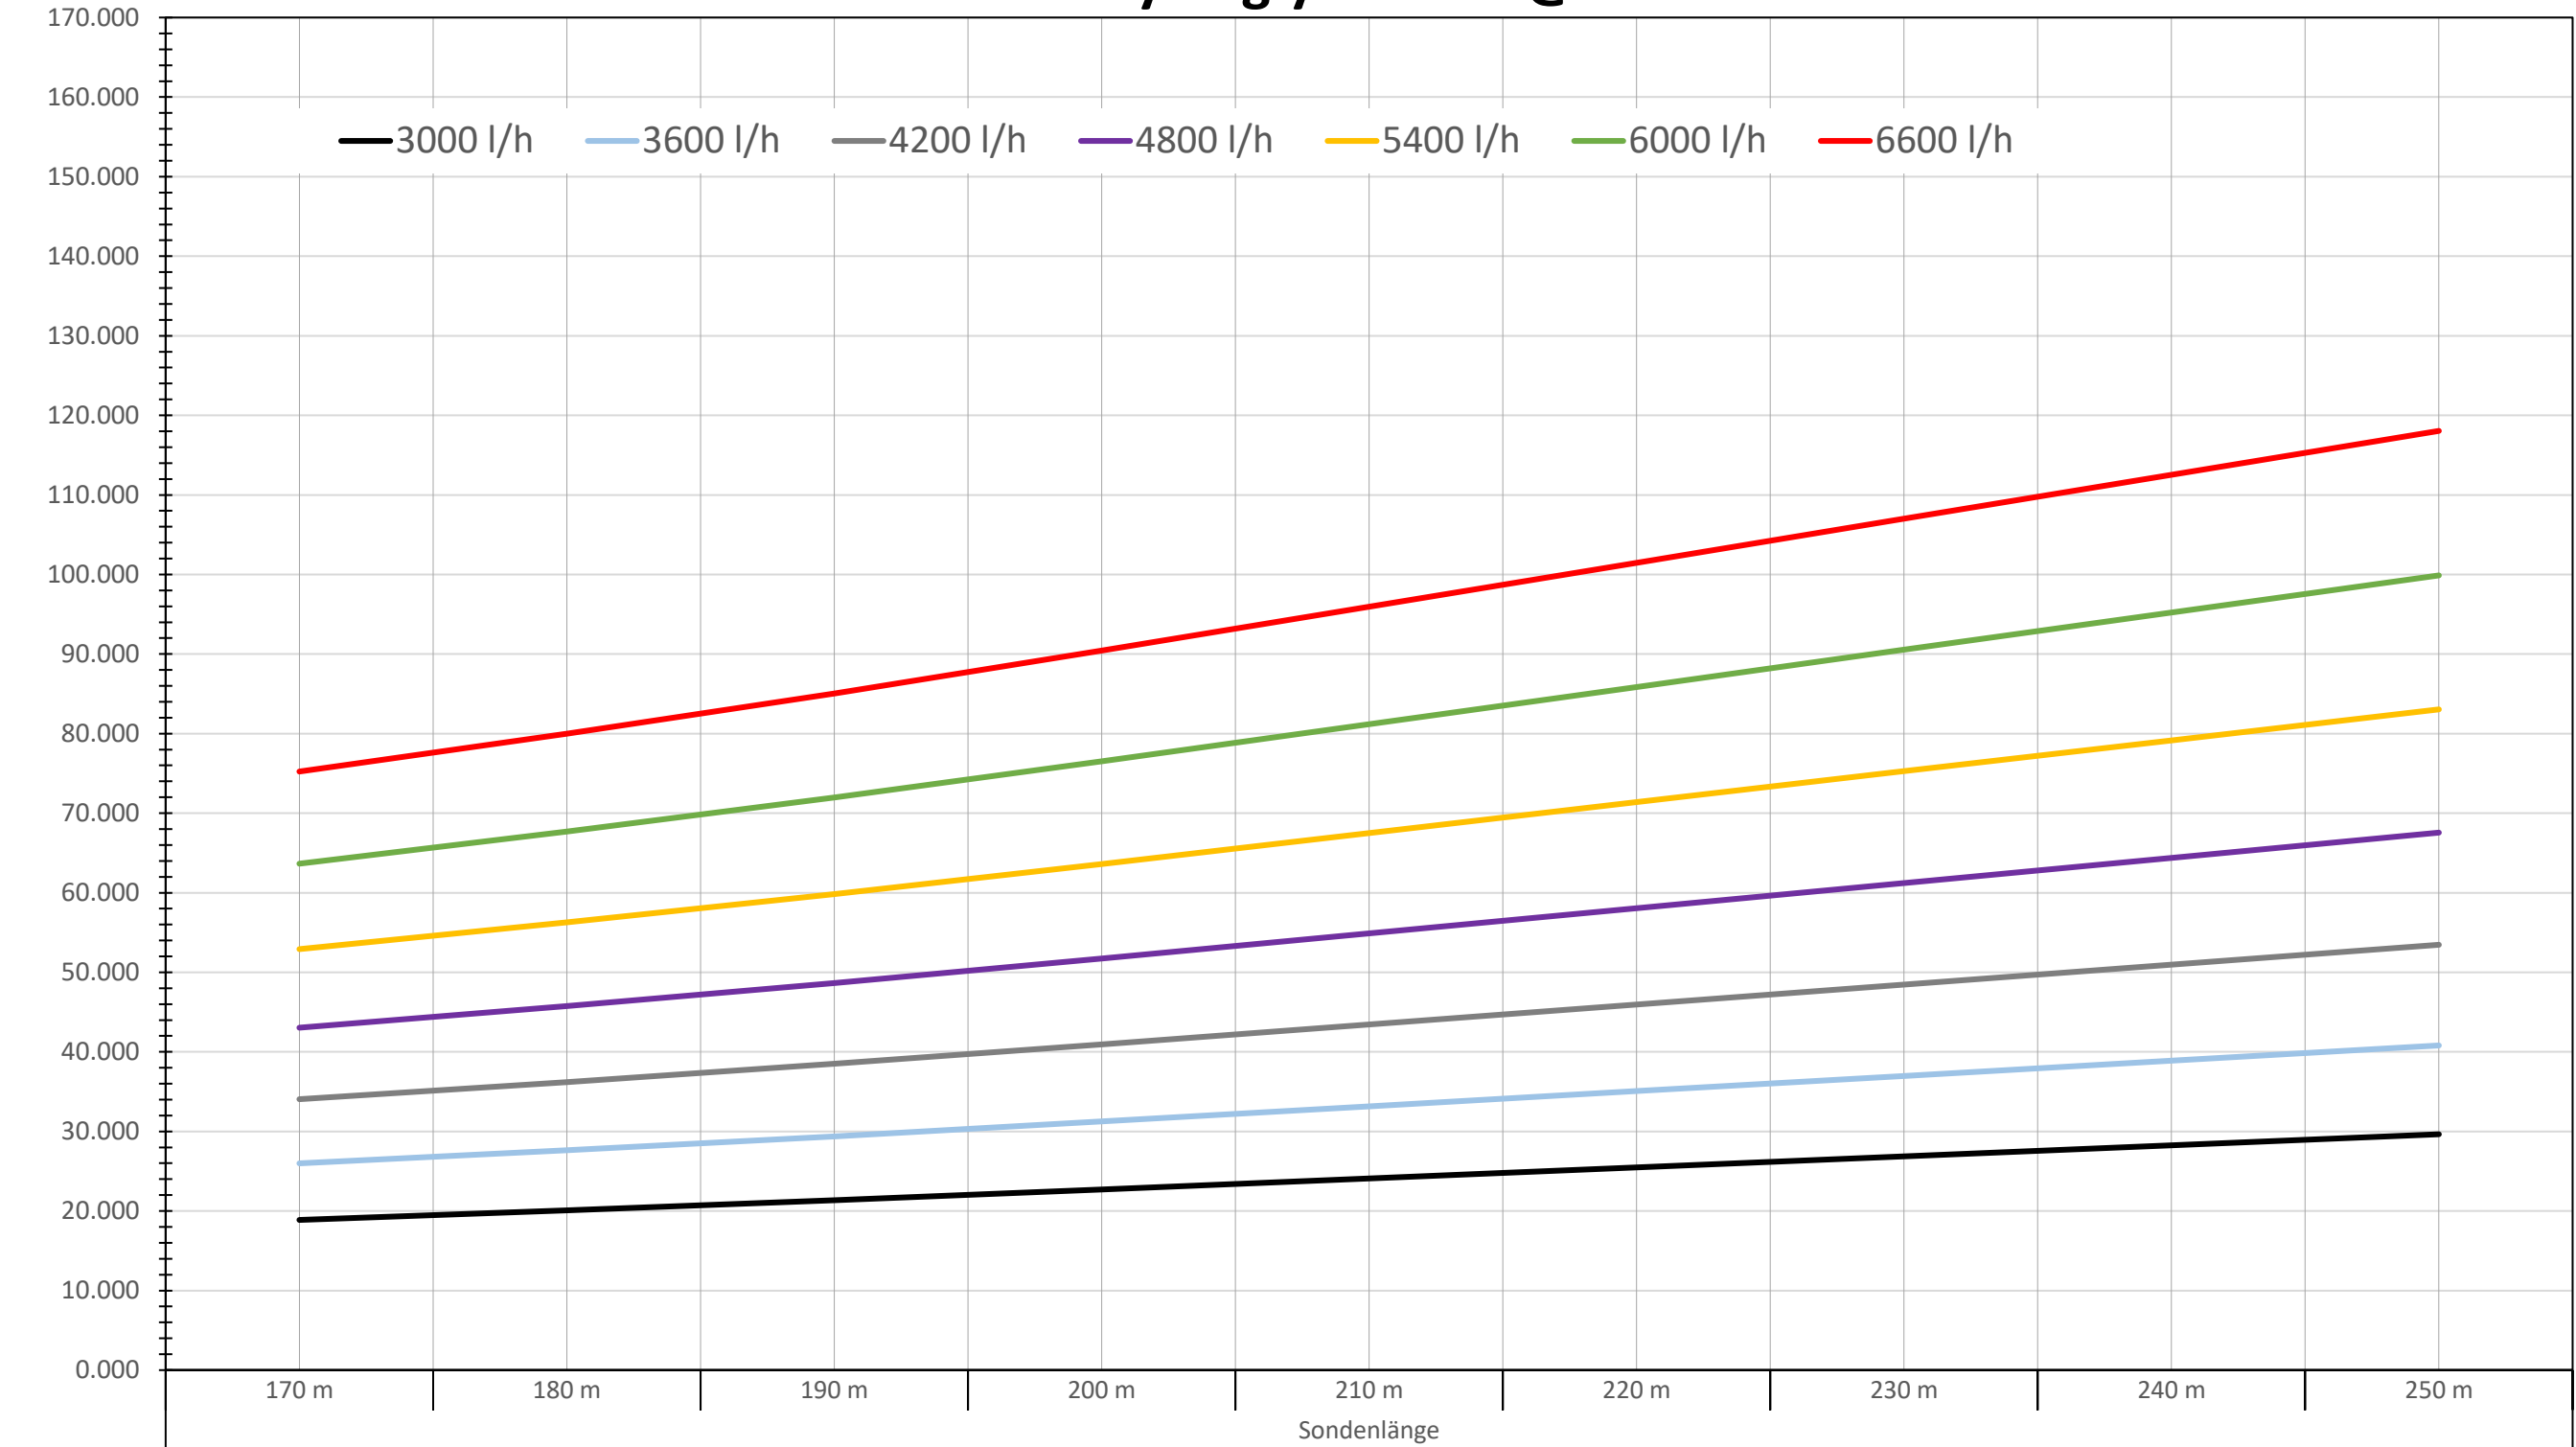

	170 m	180 m	190 m	200 m	210 m	220 m	230 m	240 m	250 m
3000 l/h	18.878	20.076	21.347	22.698	24.088	25.477	26.867	28.257	29.647
3600 l/h	25.989	27.637	29.387	31.246	33.158	35.070	36.982	38.894	40.806
4200 l/h	34.054	36.214	38.505	40.940	43.444	45.948	48.452	50.956	53.460
4800 l/h	43.039	45.767	48.663	51.739	54.902	58.065	61.229	64.392	67.555
5400 l/h	52.914	56.267	59.826	63.607	67.494	71.381	75.268	79.156	83.043
6000 l/h	63.652	67.685	71.965	76.512	81.187	85.861	90.535	95.210	99.884
6600 l/h	75.233	79.998	85.056	90.429	95.952	101.475	106.998	112.521	118.044