



GEROtherm® SAVE

The robust collector/distributor
with low pressure loss
and excellent flexibility

Simple installation with the GEROtherm® SAVE collector and distributor

You can trust the quality of our premium products. They are easy to install, and work safely and reliably. Flat-sealing connections let you assemble them quickly.

The welded connections comply with the DVS Guideline 2207-1, while the GEROtherm® SAVE collector/distributor meets the requirements of SIA 384/6.

GEROtherm® SAVE collector/distributor



The GEROtherm® SAVE collector/distributors are certified and monitored: SKZ certificate No. A 278



The GEROtherm® SAVE collector/distributors stand out thanks to their **extremely low pressure losses**, thus boosting the overall efficiency of the plant. The Kvs values are available for all SAVE products. They are quick and easy to install thanks to their flat-sealing connections, with no need for complex hemp sealing. Should you have any special needs or wishes, we are the right partner for you. We deliver individually customised products quickly.

Sturdy, corresponding fastening sets are available for all GEROtherm® SAVE products. These all feature noise-insulating clamps.



Figure 1: Fastening set for SAVE 97/125

Every GEROtherm® SAVE collector/distributor features a QR code that links to our assembly video.



Figure 2: SAVE 125

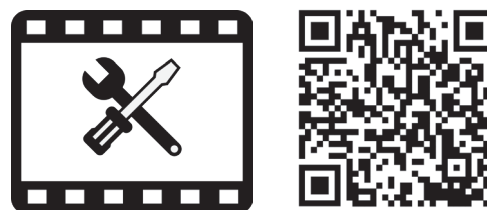



Figure 3: QR code with link to our assembly video

	SAVE 97	SAVE 125	SAVE 180	SAVE 250
Max. flow rate @ 1 m/s	≤ 7.9 m³/h	≤ 19.6 m³/h	≤ 48.4 m³/h	≤ 118.4 m³/h
Number of connections	de 32 mm 2–8 connections	de 32 mm customised products only	de 32 mm freely selectable	de 32 mm freely selectable
	de 40 mm and de 50 mm 2–6 connections	de 40 mm and de 50 mm 2-15 connections	de 40 mm and de 50 mm freely selectable	de 40 mm and de 50 mm freely selectable
Filling/drainage valve	available with or without			
Bleeder	provided with delivery (G ½")			
Rp ½" connection	1	3	freely selectable	freely selectable
Ball valve	type GF 375 DN 32 with removable ball seat and flat-sealing connections			
Balancing valves inline setter	de 32 mm: 20–70 l/min or 5–42 l/min	de 32 mm: 20–70 l/min or 5–42 l/min customised products only	de 32 mm: 20–70 l/min or 5–42 l/min	de 32 mm: 20–70 l/min or 5–42 l/min
		de 40 mm: 20–70 l/min or 5–42 l/min		
		de 50 mm: 20–70 l/min or 5–42 l/min		
Balancing valves hyline setter	de 40 mm: 10–25 l/min or 20–60 l/min	de 40 mm: 20–60 l/min	de 40 mm: 10–25 l/min or 20–60 l/min	de 40 mm: 10–25 l/min or 20–60 l/min
			de 50 mm: 20–60 l/min	
Main outlet to heat pump	External thread R2" PE pipe 63 mm	PE pipe de 63 mm PE pipe de 75 mm PE pipe de 90 mm PE pipe de 110 mm	freely selectable	freely selectable
	Optional: External thread R 1 1/4" External thread R 1 1/2"	External thread R 2 1/2" External thread R 2" Internal thread Rp 2"		
		Loose flange de 63 mm / DN 50 Loose flange de 75 mm / DN 65 Loose flange de 90 mm / DN 80 Loose flange de 110 mm / DN 100		
Availability	Ex stock or customised product	Ex stock or customised product	Customised product	Customised product

Alongside our wide range of standard SAVE products available ex stock, we also offer individually customised products. Based on your specific needs, we plan and manufacture GEROtherm® SAVE geothermal distributors from thick-walled pipes. These collector/distributors allow you to freely select the geometric

shape, centre distance of the individual connections and various fittings, for example.

Here are some examples of customised GEROtherm® SAVE products

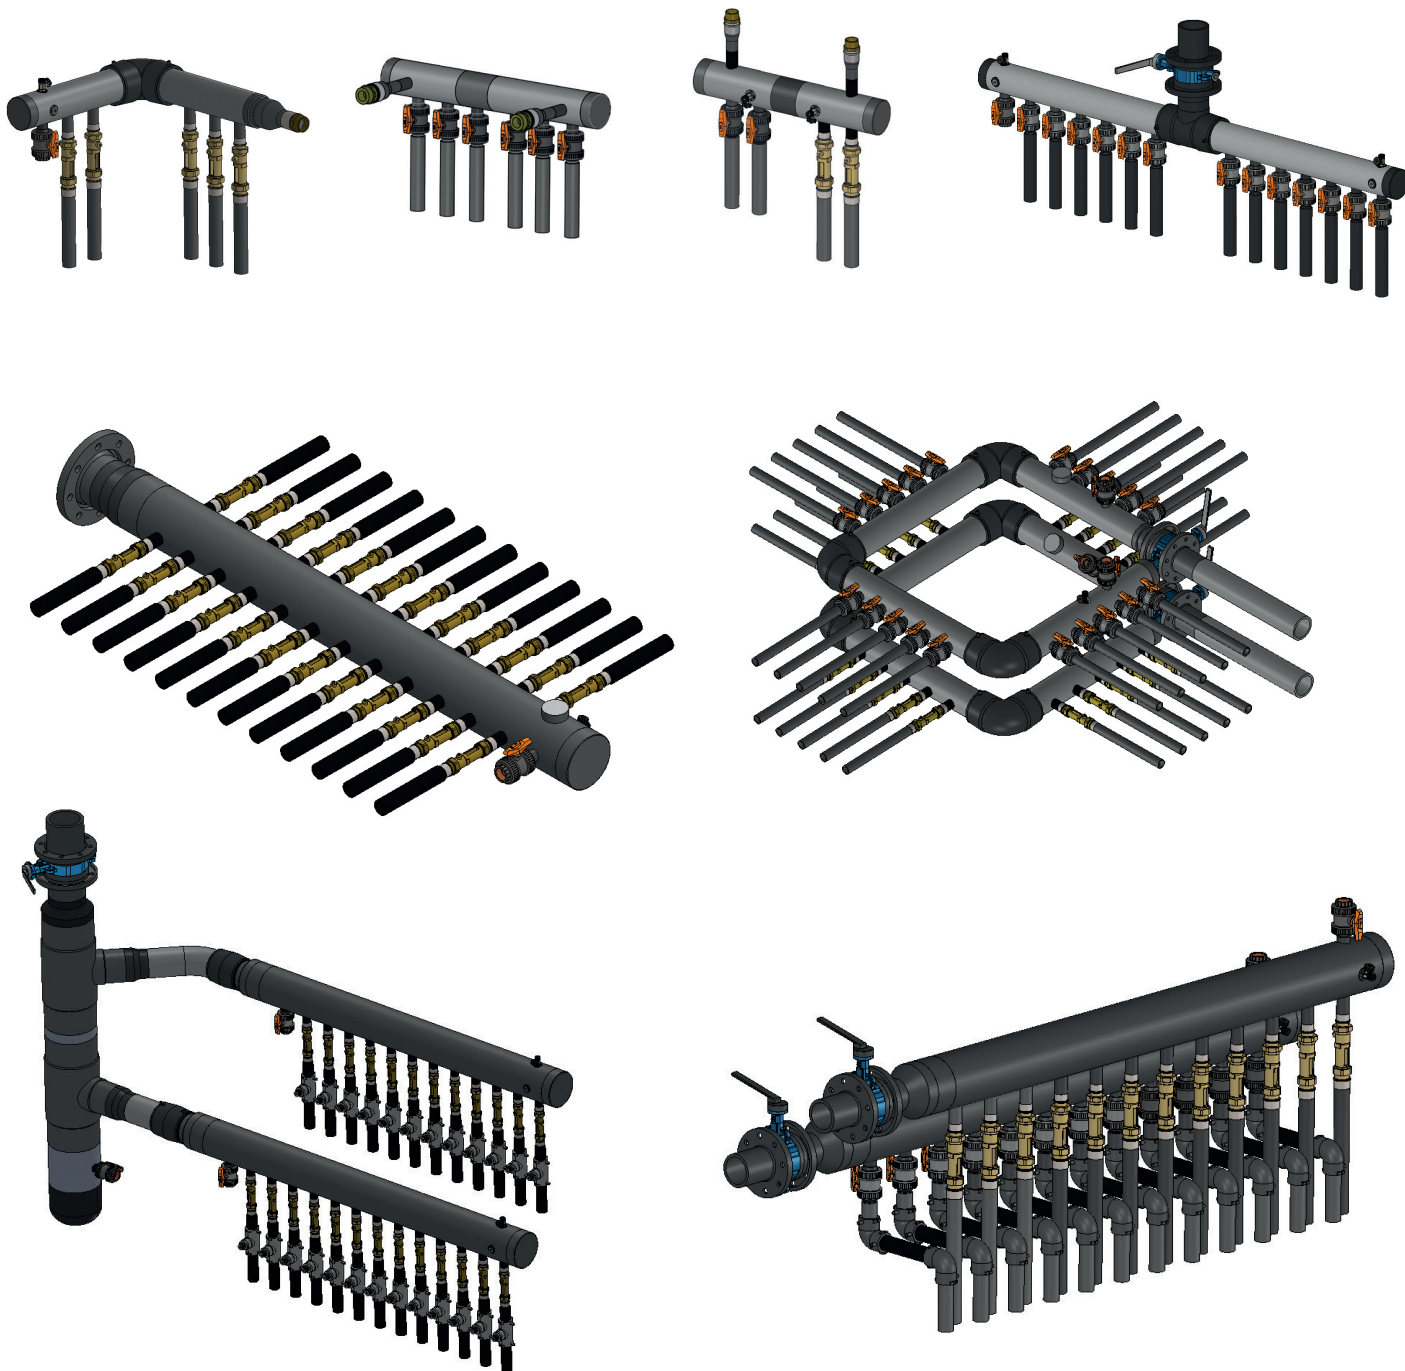

HakaGerodur AG
Giessenstrasse 3
CH-8717 Benken

T +41 (0)55 293 25 25

sekretariat@hakagerodur.ch
www.hakagerodur.ch