



Technical Data Sheet

GEROtherm®


Spacer for geothermal probes

GEROthem® Spacer for geothermal probe


Material	Polyethylen-HD (non classification)
Spacer description	DIHA 2x40 (104276) DIHA 4x32 (104277) DIHA 4x40 (104278)
Installation and operation	For maintaining the distance between the individual tubes of the geothermal probe, every 2 to 5 m.
Article no	104276 - 104278
Physical properties	
Density	0.95 - 0.97 g / cm ³
Mechanical properties	
Elongation at break	>/= 300%
Hardness	
Shore hardness (Shore D (3 sec.))	63
Thermal propertys	
Max. Temperature	+ 40°C
Min. Temperature	- 20°C

All information subject to change

DIHA 2 x DE

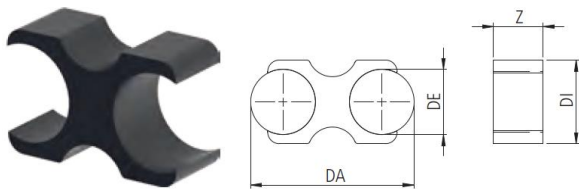

DIHA 4 x DE

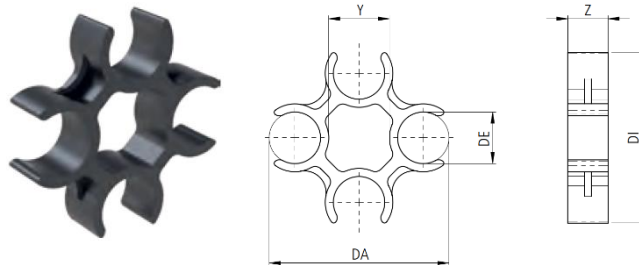

Article No.	Description	Material	DE	DA	DI	Y	Z	Weight g/Stk.
104276	DIHA 2 x 40	PE-HD	40	90	50	-	30	34
104277	DIHA 4 x 32	PE-HD	32	120	110	45	25	50
104278	DIHA 4 x 40	PE-HD	40	130	117	41	28.5	82