


Metal reel for GEROtherm[®] geothermal probes

Double-U geothermal probes on a metal reel

Product name	Maximum production length*	Weight of empty geothermal probe	Number of reels (for double-U probes)
DUPLEX de50mm PN16	340m	952kg	1
DUPLEX de50mm PN20	340m	1126kg	1
VARIO de50mm up to PN20	340m	1020kg	1
VARIO de50mm up to PN25	340m	1105kg	1
FLUX de43mm up to PN32	430m	1030kg	1
FLUX de53mm up to PN38	260m	972kg	1

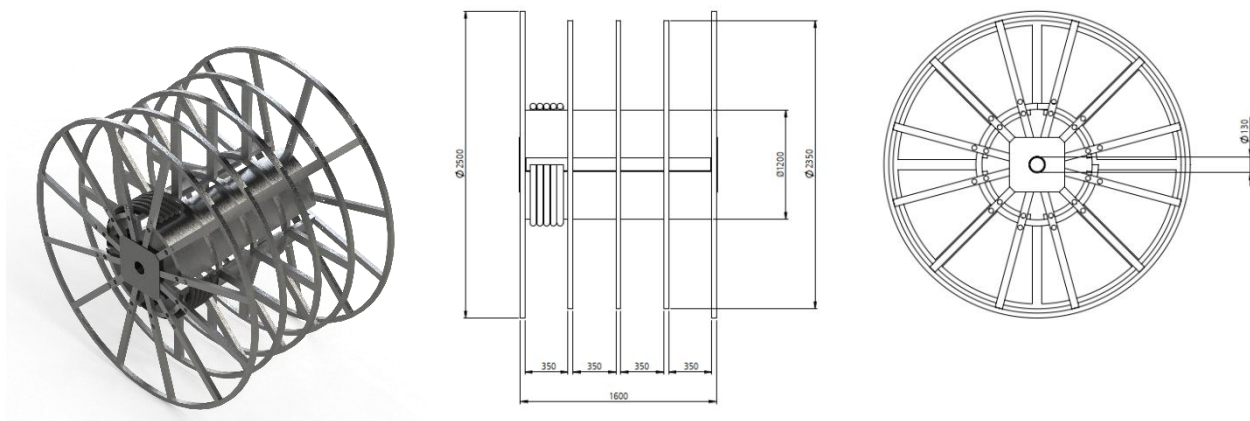

***Maximum Production Length:** The maximum production length specifies the longest possible length that can be manufactured on the coil. The earth-side component of the ground source heat pump system must withstand the pressures and temperatures encountered during operation. Relevant standards and regulations must be observed.

Further information

- The reel has no shaft or suspension device
- Crane required for unloading
- Loading and unloading requires an open truck or with roll top.
- Hydraulic braking and unwinding device absolutely required on site (to be provided by the customer)


Metal reel weight (empty): 490 kg

Rental: 6 weeks included, then EURO 100.00/week

Return transport fee EURO 150.00/reel (export on request)

Single-U geothermal probes on a metal reel

Product name	Maximum production length*	Empty weight of geothermal probe	Number of reels (for double-U probes)
DUPLEX de50mm PN16	800m	1110kg	2
DUPLEX de50mm PN20	800m	1314kg	2
VARIO de50mm up to PN20	800m	1215kg	2
VARIO de50mm up to PN25	800m	1400kg	2
FLUX de43mm up to PN32	950m	1300kg	2
FLUX de53mm up to PN38	650m	1350kg	2
DUPLEX de63mm PN16	520m	1105kg	2
DUPLEX de63mm PN20	520m	1300kg	2
DUPLEX de63mm PN25	520m	1550kg	2

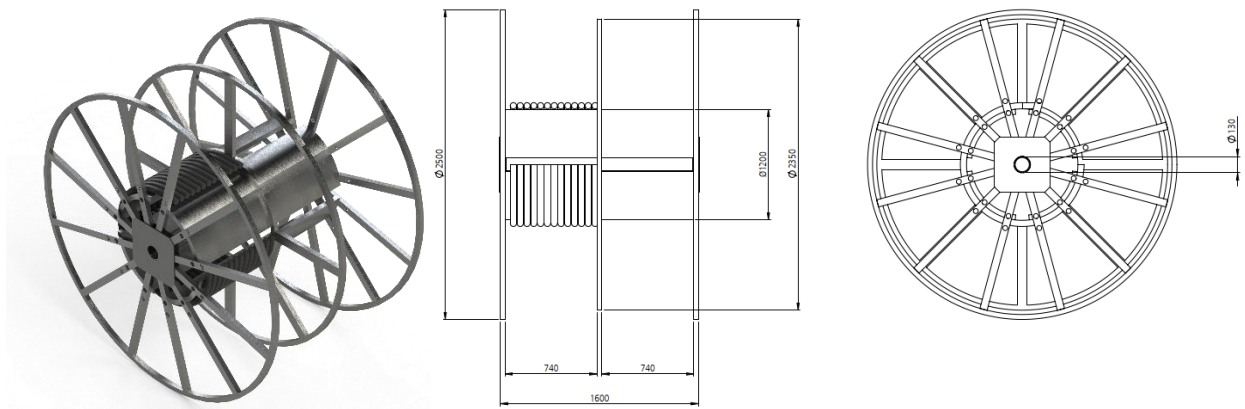

***Maximum Production Length:** The maximum production length specifies the longest possible length that can be manufactured on the coil. The earth-side component of the ground source heat pump system must withstand the pressures and temperatures encountered during operation. Relevant standards and regulations must be observed.

Further information

- The reel has no shaft or suspension device
- Crane required for unloading
- Loading and unloading requires an open truck or with roll top.
- Hydraulic braking and unwinding device absolutely required on site (to be provided by the customer)

Metal reel weight (empty): 420 kg

Rental: 6 weeks included, then EURO 100.00/week

Return transport fee EURO 150.00/reel (export on request)