


Perte de pression **VARIO** Ø 40 jusqu'à PN25 double-U (2 circuits en parallèle)
avec de l'éthylène glycol 25% @ 0°C

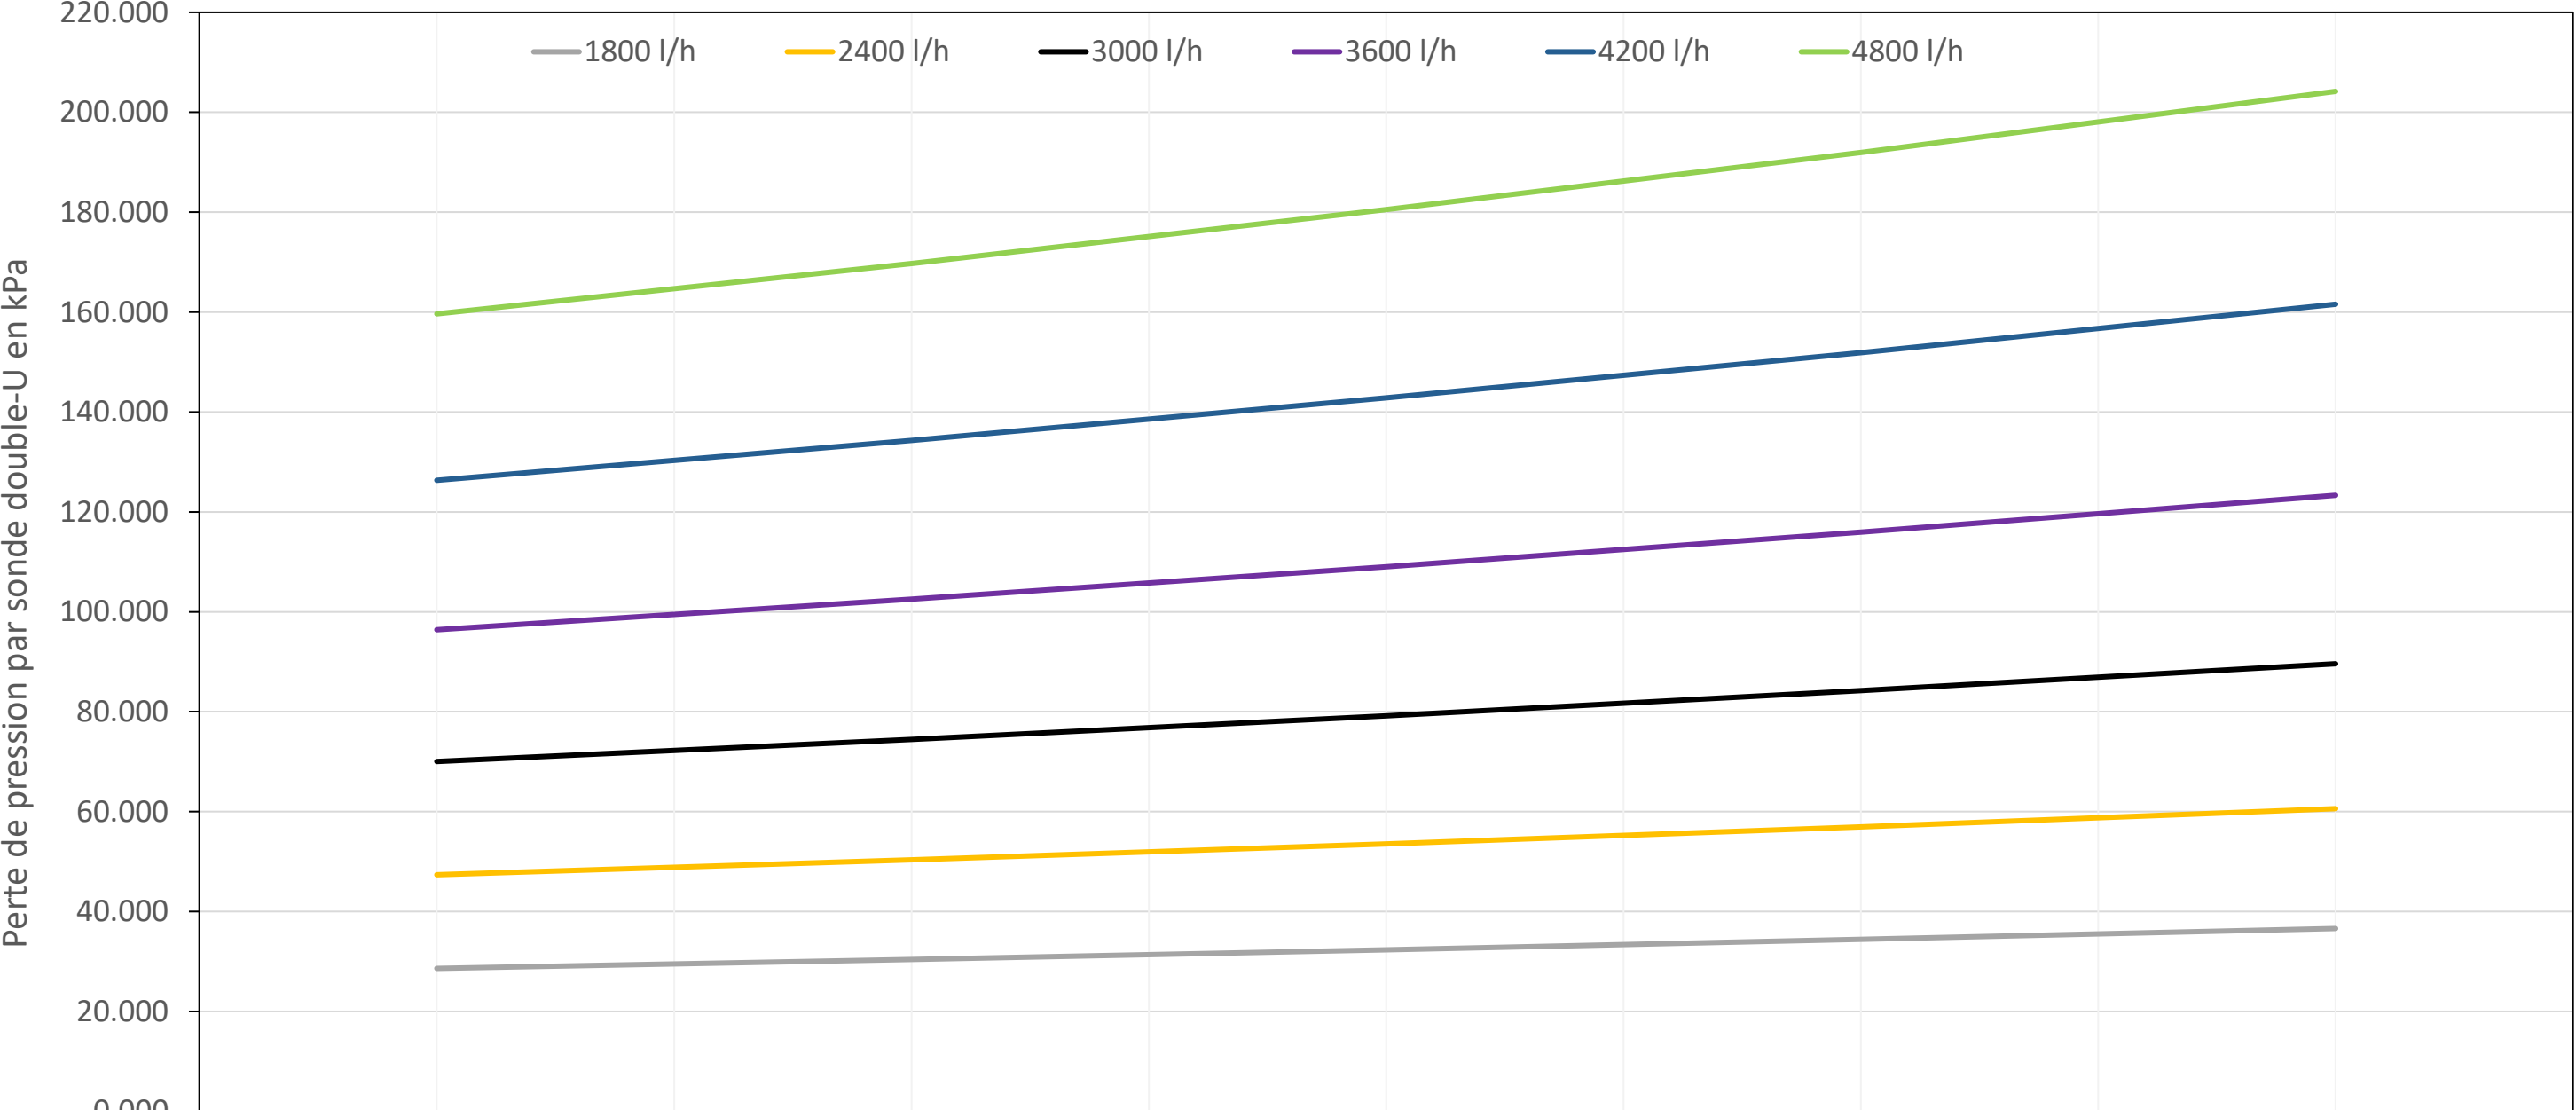

	210m	220m	230m	240m	250m
1800 l/h	28.613	30.426	32.356	34.413	36.608
2400 l/h	47.372	50.371	53.565	56.970	60.601
3000 l/h	70.043	74.476	79.197	84.229	89.597
3600 l/h	96.416	102.516	109.013	115.937	123.324
4200 l/h	126.327	134.318	142.828	151.898	161.573
4800 l/h	159.645	169.741	180.493	191.952	204.176