


Perte de pression **VARIO** Ø 50 jusqu'à PN25 double-U (2 circuits en parallèle)  
avec de l'éthylène glycol 25% @ 0°C

 HakaGerodur

Perte de pression par sonde double-U en kPa

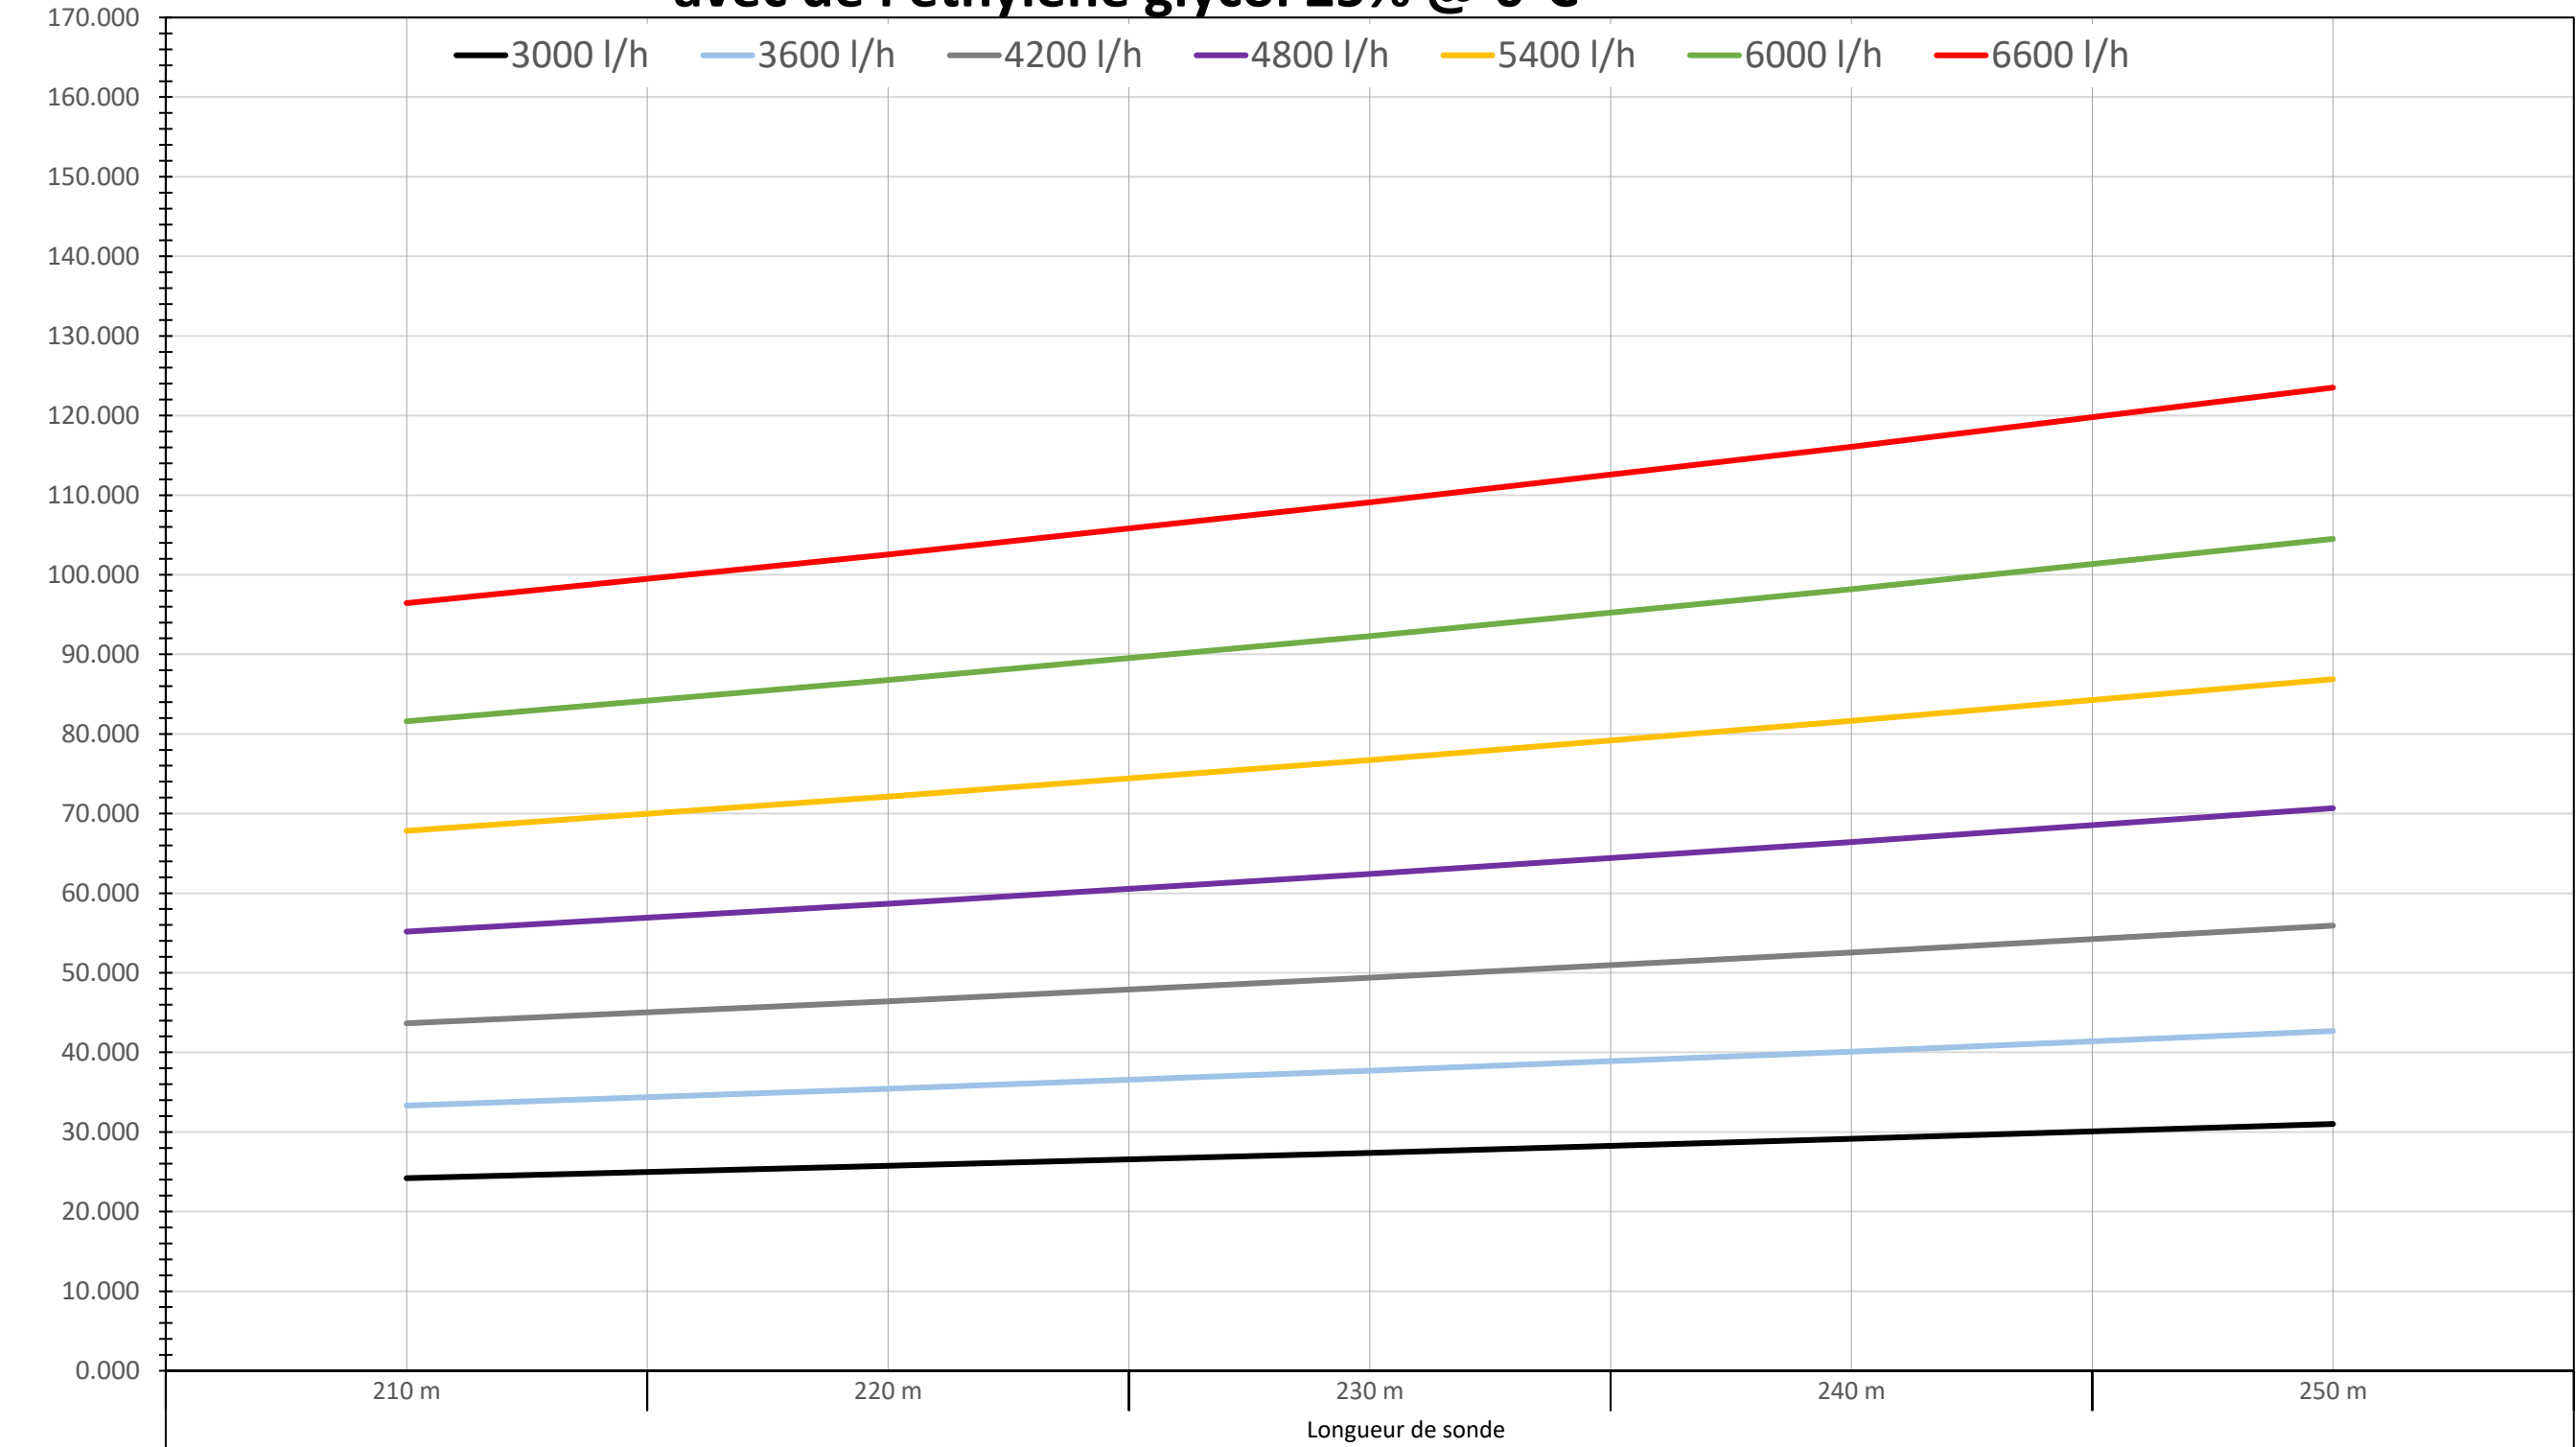

|          | Longueur de sonde |         |         |         |         |
|----------|-------------------|---------|---------|---------|---------|
|          | 210 m             | 220 m   | 230 m   | 240 m   | 250 m   |
| 3000 l/h | 24.198            | 25.738  | 27.379  | 29.132  | 31.004  |
| 3600 l/h | 33.313            | 35.431  | 37.691  | 40.102  | 42.678  |
| 4200 l/h | 43.651            | 46.426  | 49.386  | 52.544  | 55.919  |
| 4800 l/h | 55.168            | 58.674  | 62.413  | 66.404  | 70.668  |
| 5400 l/h | 67.825            | 72.134  | 76.730  | 81.636  | 86.876  |
| 6000 l/h | 81.590            | 86.773  | 92.300  | 98.199  | 104.502 |
| 6600 l/h | 96.434            | 102.559 | 109.090 | 116.062 | 123.509 |