


# Perte de pression DUPLEX Ø 32 PN16 double-U (2 circuits en parallèle) avec de l'éthylène glycol 25% @ 0°C

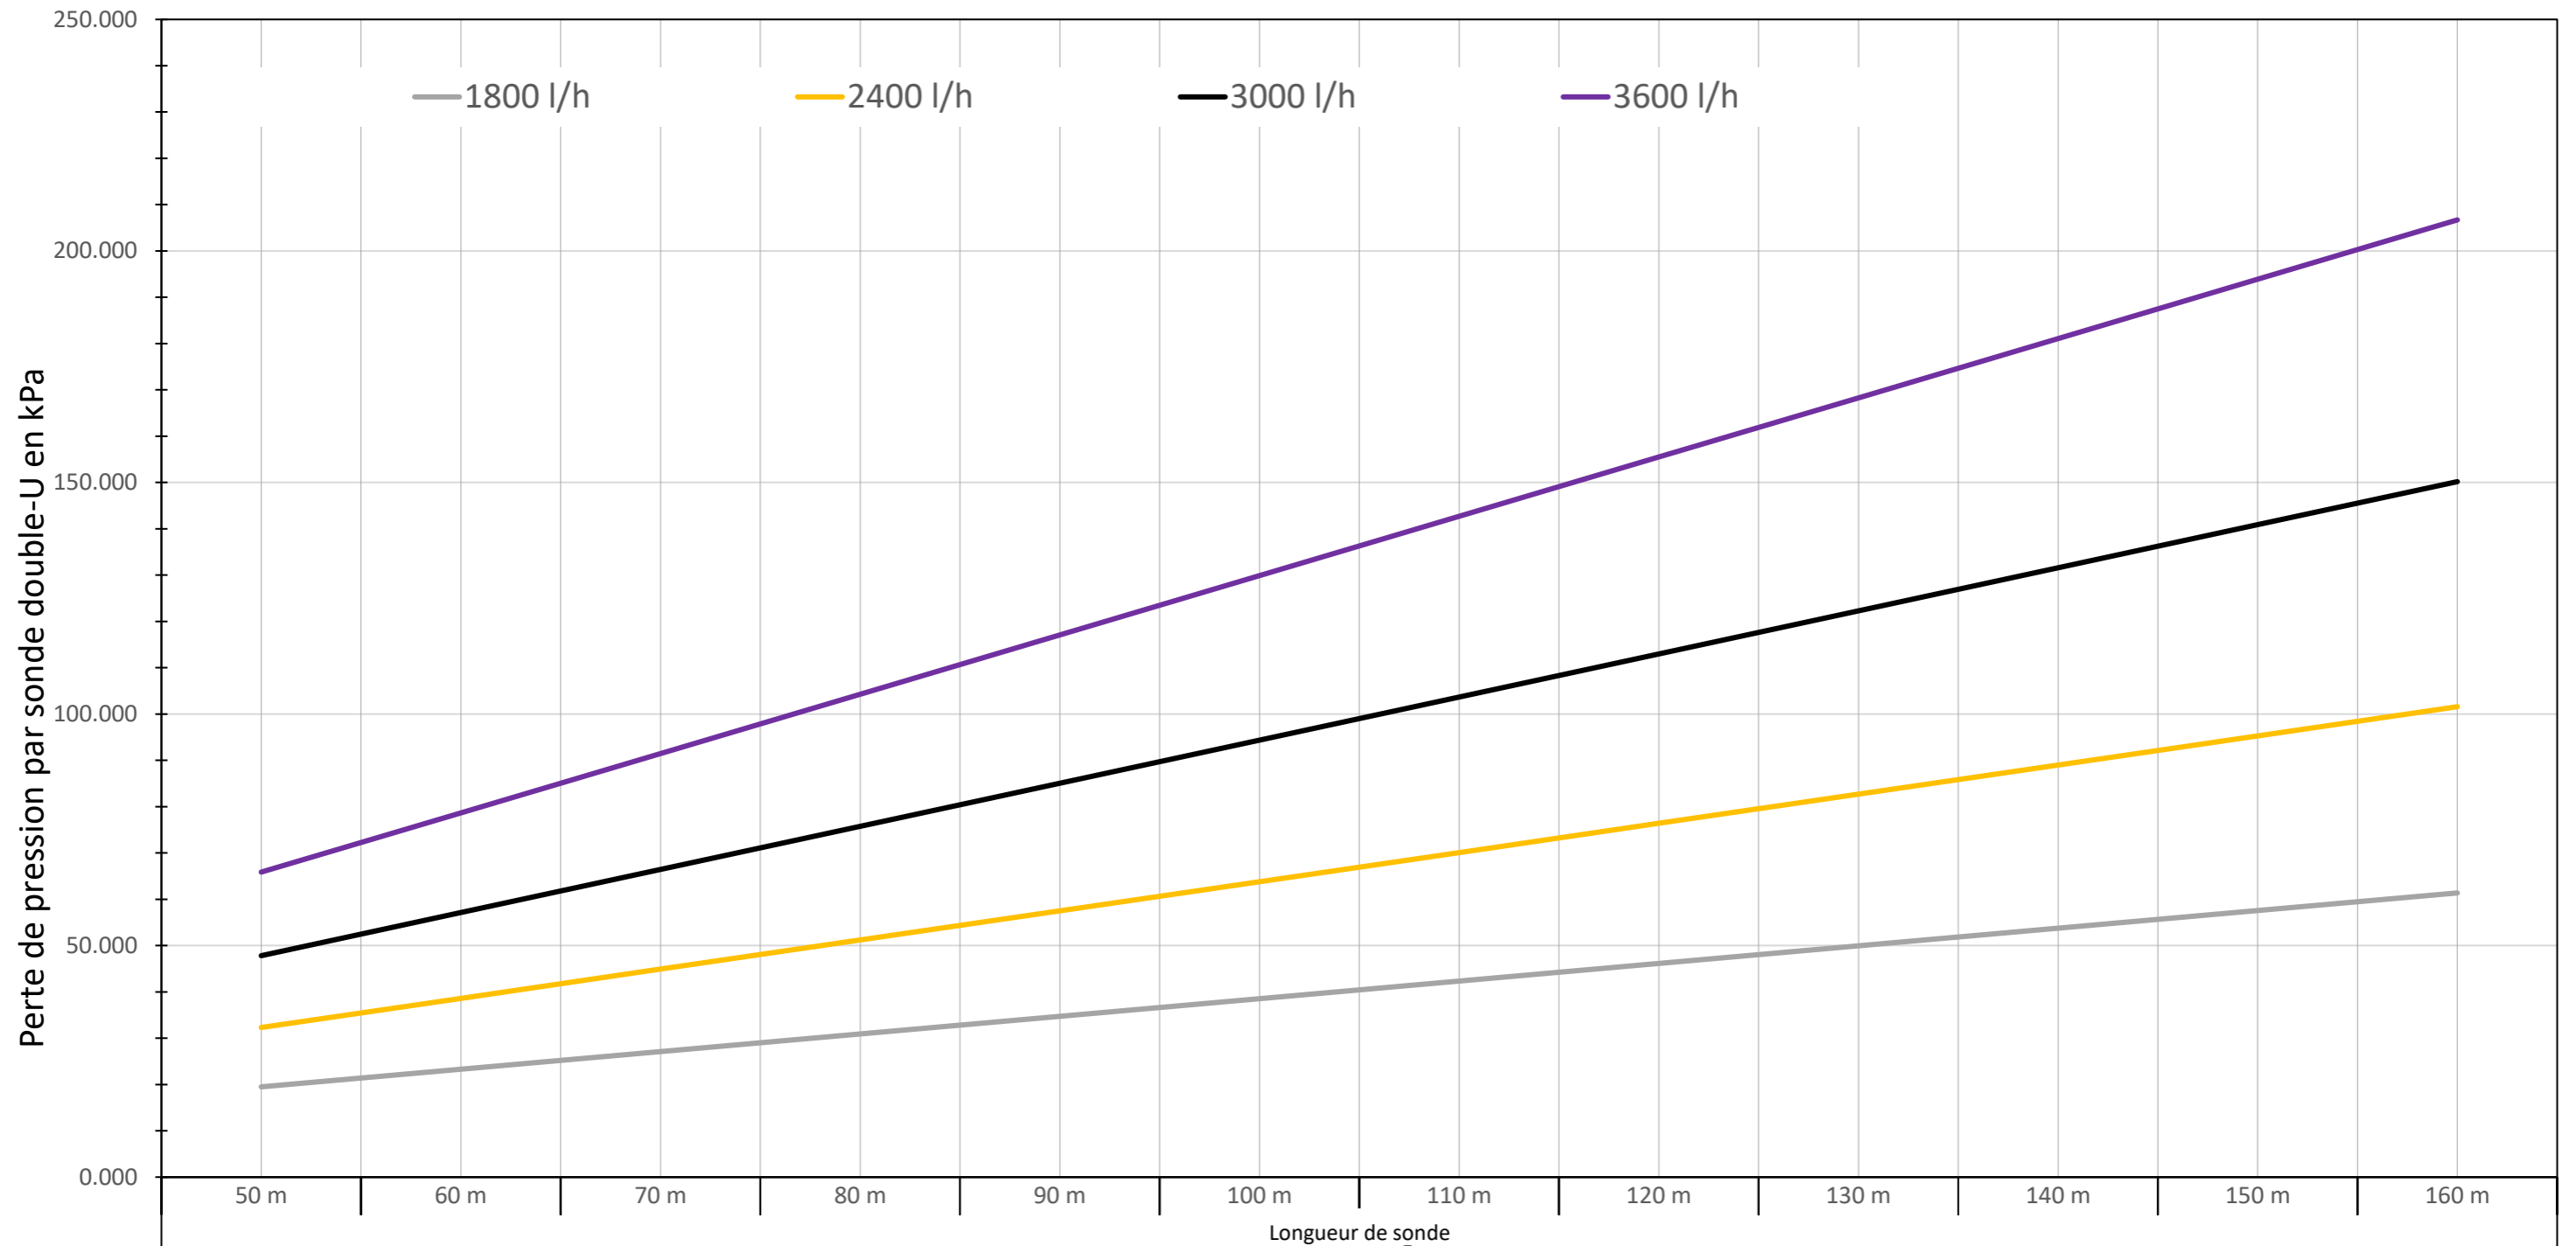

|          | 50 m   | 60 m   | 70 m   | 80 m    | 90 m    | 100 m   | 110 m   | 120 m   | 130 m   | 140 m   | 150 m   | 160 m   |
|----------|--------|--------|--------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 1800 l/h | 19.496 | 23.302 | 27.109 | 30.915  | 34.721  | 38.528  | 42.334  | 46.141  | 49.947  | 53.753  | 57.560  | 61.366  |
| 2400 l/h | 32.311 | 38.609 | 44.906 | 51.203  | 57.501  | 63.798  | 70.095  | 76.393  | 82.690  | 88.987  | 95.285  | 101.582 |
| 3000 l/h | 47.817 | 57.123 | 66.429 | 75.734  | 85.040  | 94.346  | 103.651 | 112.957 | 122.263 | 131.569 | 140.874 | 150.180 |
| 3600 l/h | 65.871 | 78.674 | 91.478 | 104.281 | 117.084 | 129.887 | 142.690 | 155.493 | 168.296 | 181.100 | 193.903 | 206.706 |