


Perte de pression DUPLEX Ø 40 PN16 double-U (2 circuits en parallèle) avec de l'éthylène glycol 25% @ 0°C

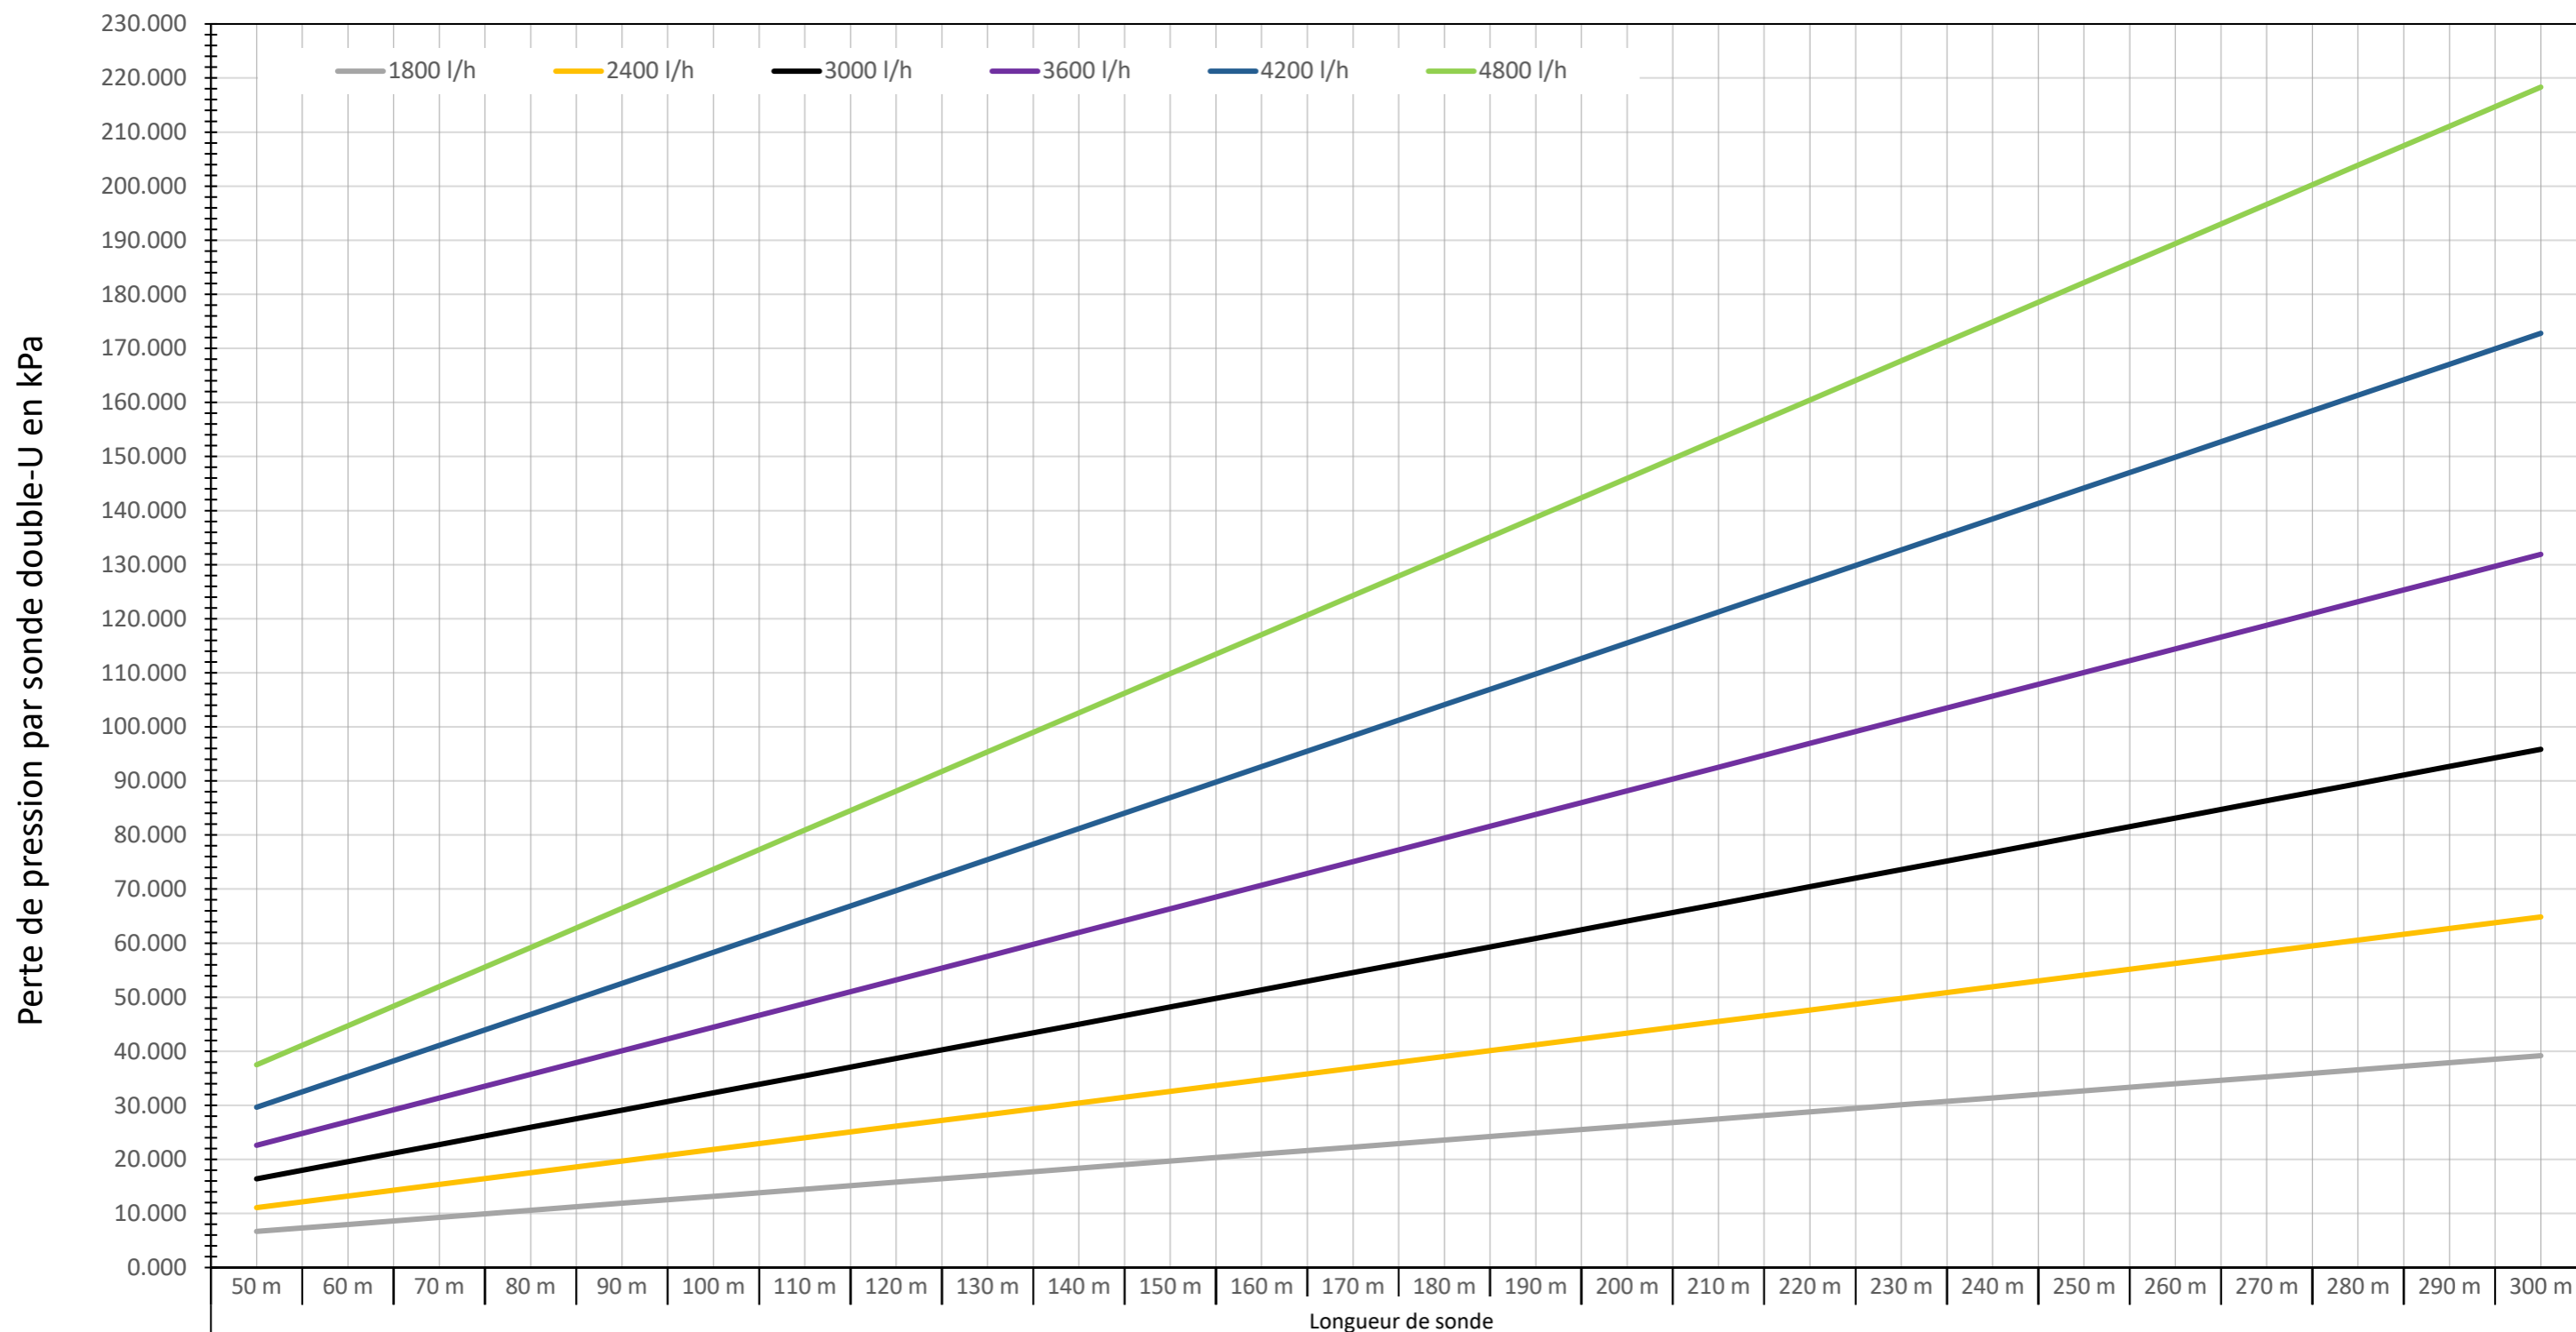

	50 m	60 m	70 m	80 m	90 m	100 m	110 m	120 m	130 m	140 m	150 m	160 m	170 m	180 m	190 m	200 m	210 m	220 m	230 m	240 m	250 m	260 m	270 m	280 m	290 m	300 m
1800 l/h	6.686	7.986	9.286	10.586	11.885	13.185	14.485	15.784	17.084	18.384	19.684	20.983	22.283	23.583	24.883	26.182	27.482	28.782	30.082	31.381	32.681	33.981	35.280	36.580	37.880	39.180
2400 l/h	11.085	13.235	15.386	17.536	19.686	21.837	23.987	26.137	28.287	30.438	32.588	34.738	36.889	39.039	41.189	43.339	45.490	47.640	49.790	51.941	54.091	56.241	58.391	60.542	62.692	64.842
3000 l/h	16.409	19.587	22.764	25.942	29.119	32.297	35.474	38.652	41.829	45.007	48.184	51.362	54.539	57.717	60.894	64.072	67.249	70.427	73.604	76.782	79.960	83.137	86.315	89.492	92.670	95.847
3600 l/h	22.610	26.981	31.353	35.725	40.097	44.468	48.840	53.212	57.584	61.955	66.327	70.699	75.071	79.442	83.814	88.186	92.558	96.930	101.301	105.673	110.045	114.417	118.788	123.160	127.532	131.904
4200 l/h	29.649	35.375	41.100	46.826	52.551	58.277	64.002	69.728	75.453	81.179	86.904	92.630	98.355	104.081	109.806	115.532	121.257	126.983	132.708	138.434	144.159	149.885	155.610	161.336	167.061	172.787
4800 l/h	37.498	44.731	51.963	59.196	66.429	73.661	80.894	88.127	95.359	102.592	109.825	117.058	124.290	131.523	138.756	145.988	153.221	160.454	167.686	174.919	182.152	189.384	196.617	203.850	211.082	218.315