


Perte de pression DUPLEX Ø 40 PN20 double-U (2 circuits en parallèle)  HakaGerodur  
avec de l'éthylène glycol 25% @ 0°C

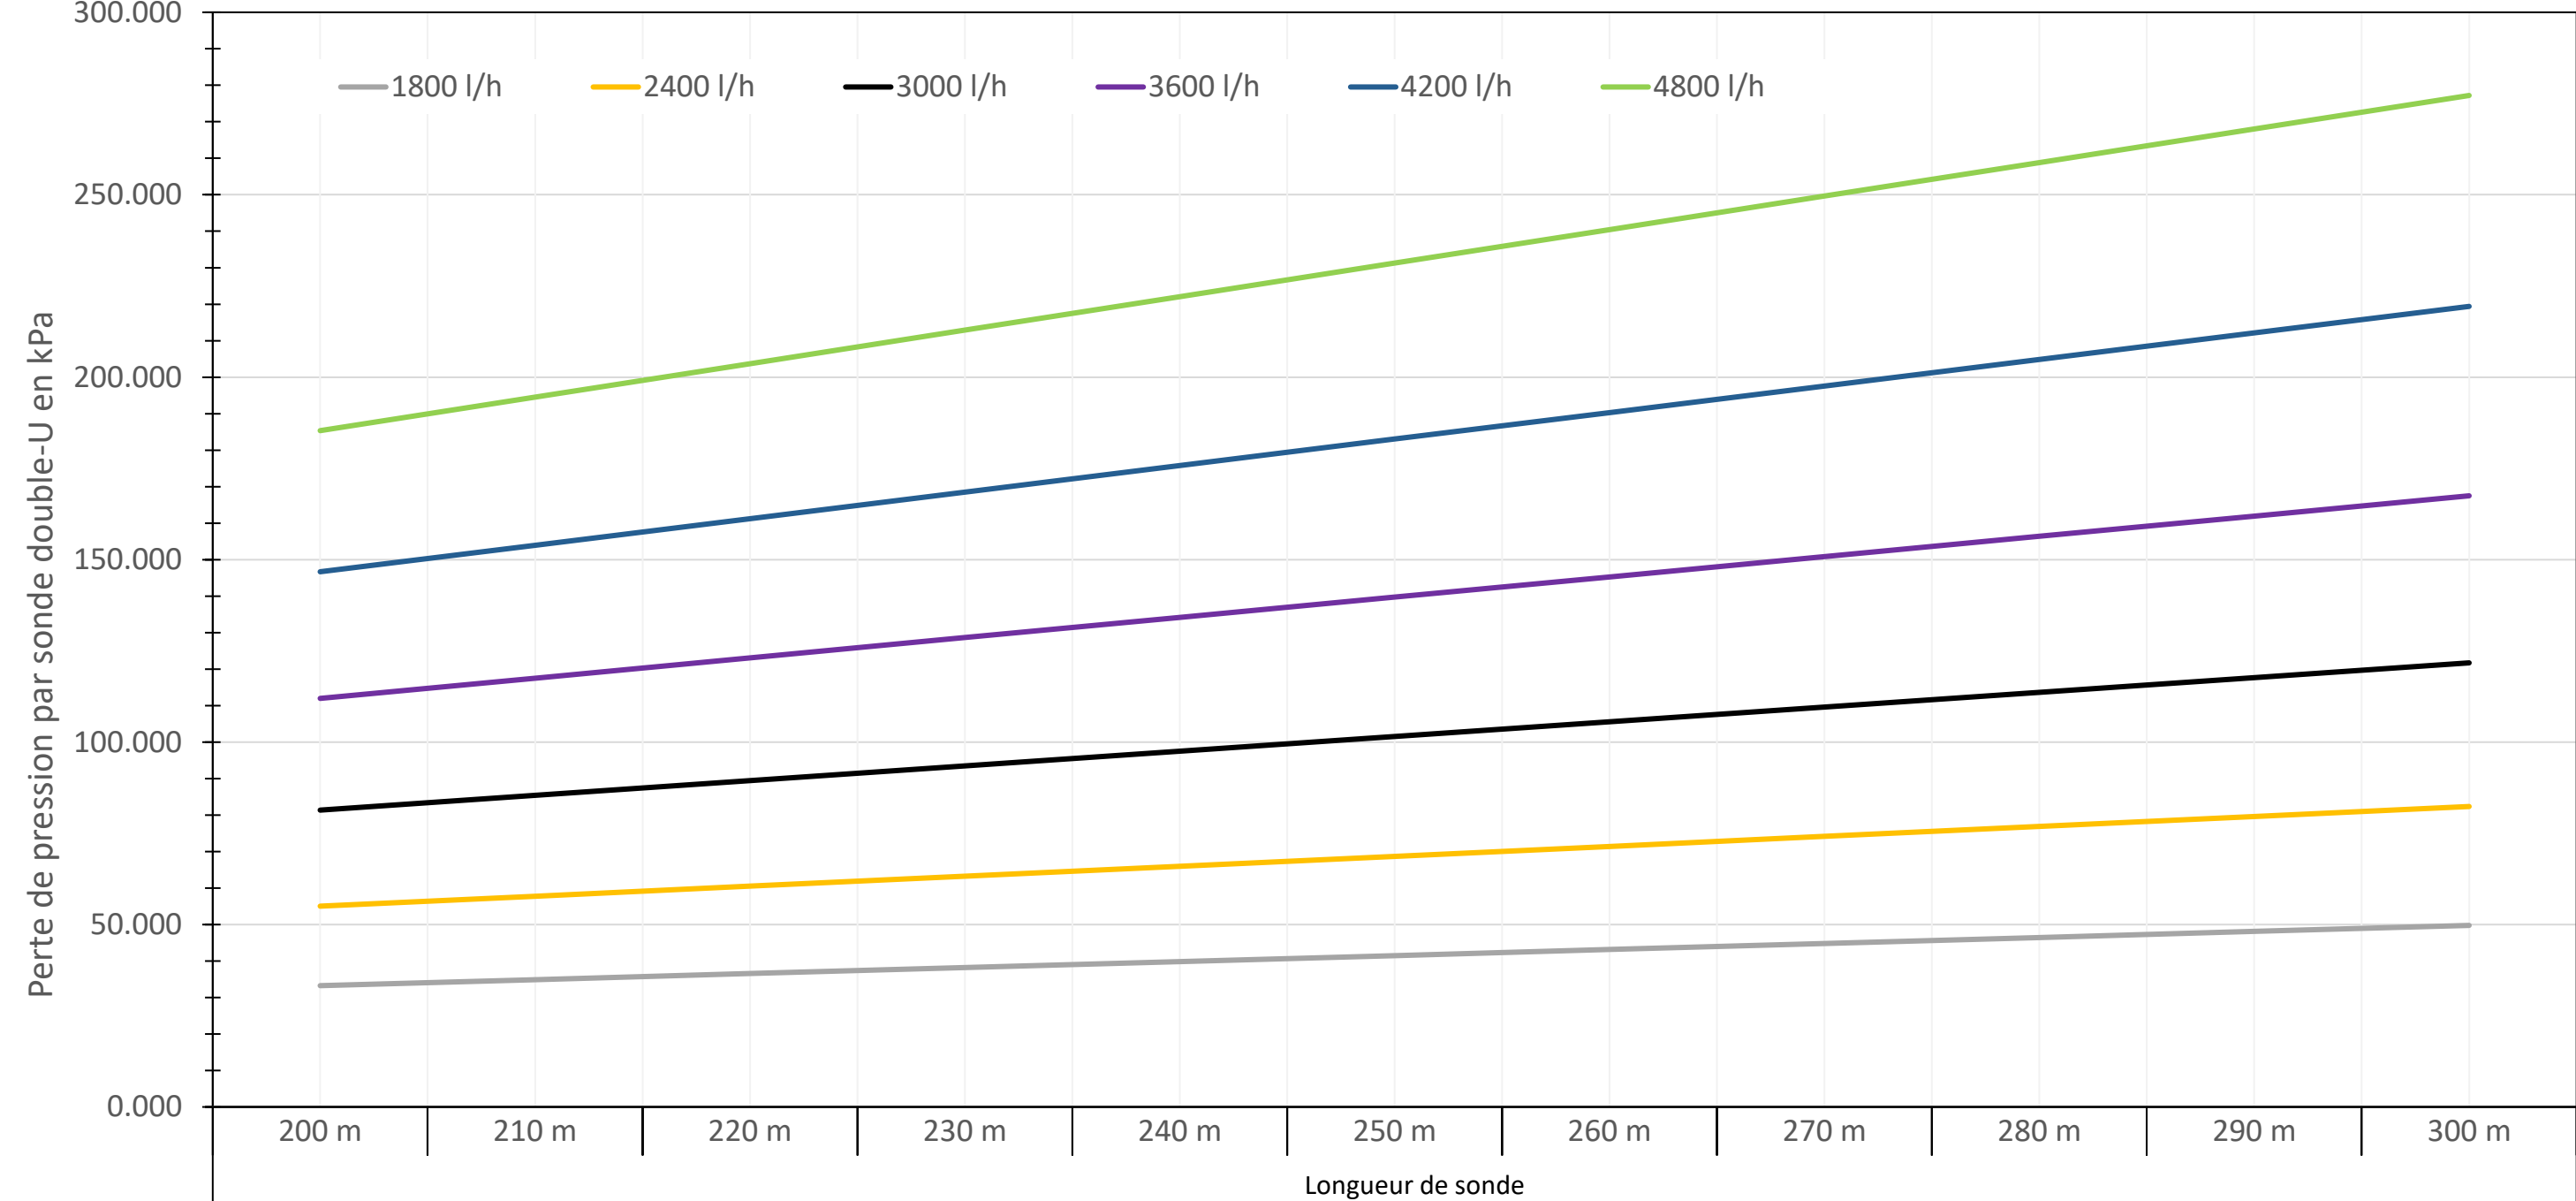

|          | 200 m   | 210 m   | 220 m   | 230 m   | 240 m   | 250 m   | 260 m   | 270 m   | 280 m   | 290 m   | 300 m   |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 1800 l/h | 33.244  | 34.894  | 36.545  | 38.196  | 39.846  | 41.497  | 43.148  | 44.799  | 46.449  | 48.100  | 49.751  |
| 2400 l/h | 55.027  | 57.758  | 60.489  | 63.220  | 65.951  | 68.682  | 71.413  | 74.143  | 76.874  | 79.605  | 82.336  |
| 3000 l/h | 81.349  | 85.385  | 89.420  | 93.456  | 97.491  | 101.527 | 105.562 | 109.598 | 113.634 | 117.669 | 121.705 |
| 3600 l/h | 111.964 | 117.516 | 123.069 | 128.621 | 134.173 | 139.725 | 145.278 | 150.830 | 156.382 | 161.935 | 167.487 |
| 4200 l/h | 146.681 | 153.953 | 161.225 | 168.496 | 175.768 | 183.039 | 190.311 | 197.582 | 204.854 | 212.126 | 219.397 |
| 4800 l/h | 185.347 | 194.533 | 203.719 | 212.905 | 222.090 | 231.276 | 240.462 | 249.648 | 258.833 | 268.019 | 277.205 |