


# Perte de pression DUPLEX Ø 40 PN20 double-U (2 circuits en parallèle) HakaGerodur avec de l'eau à @ 15°C

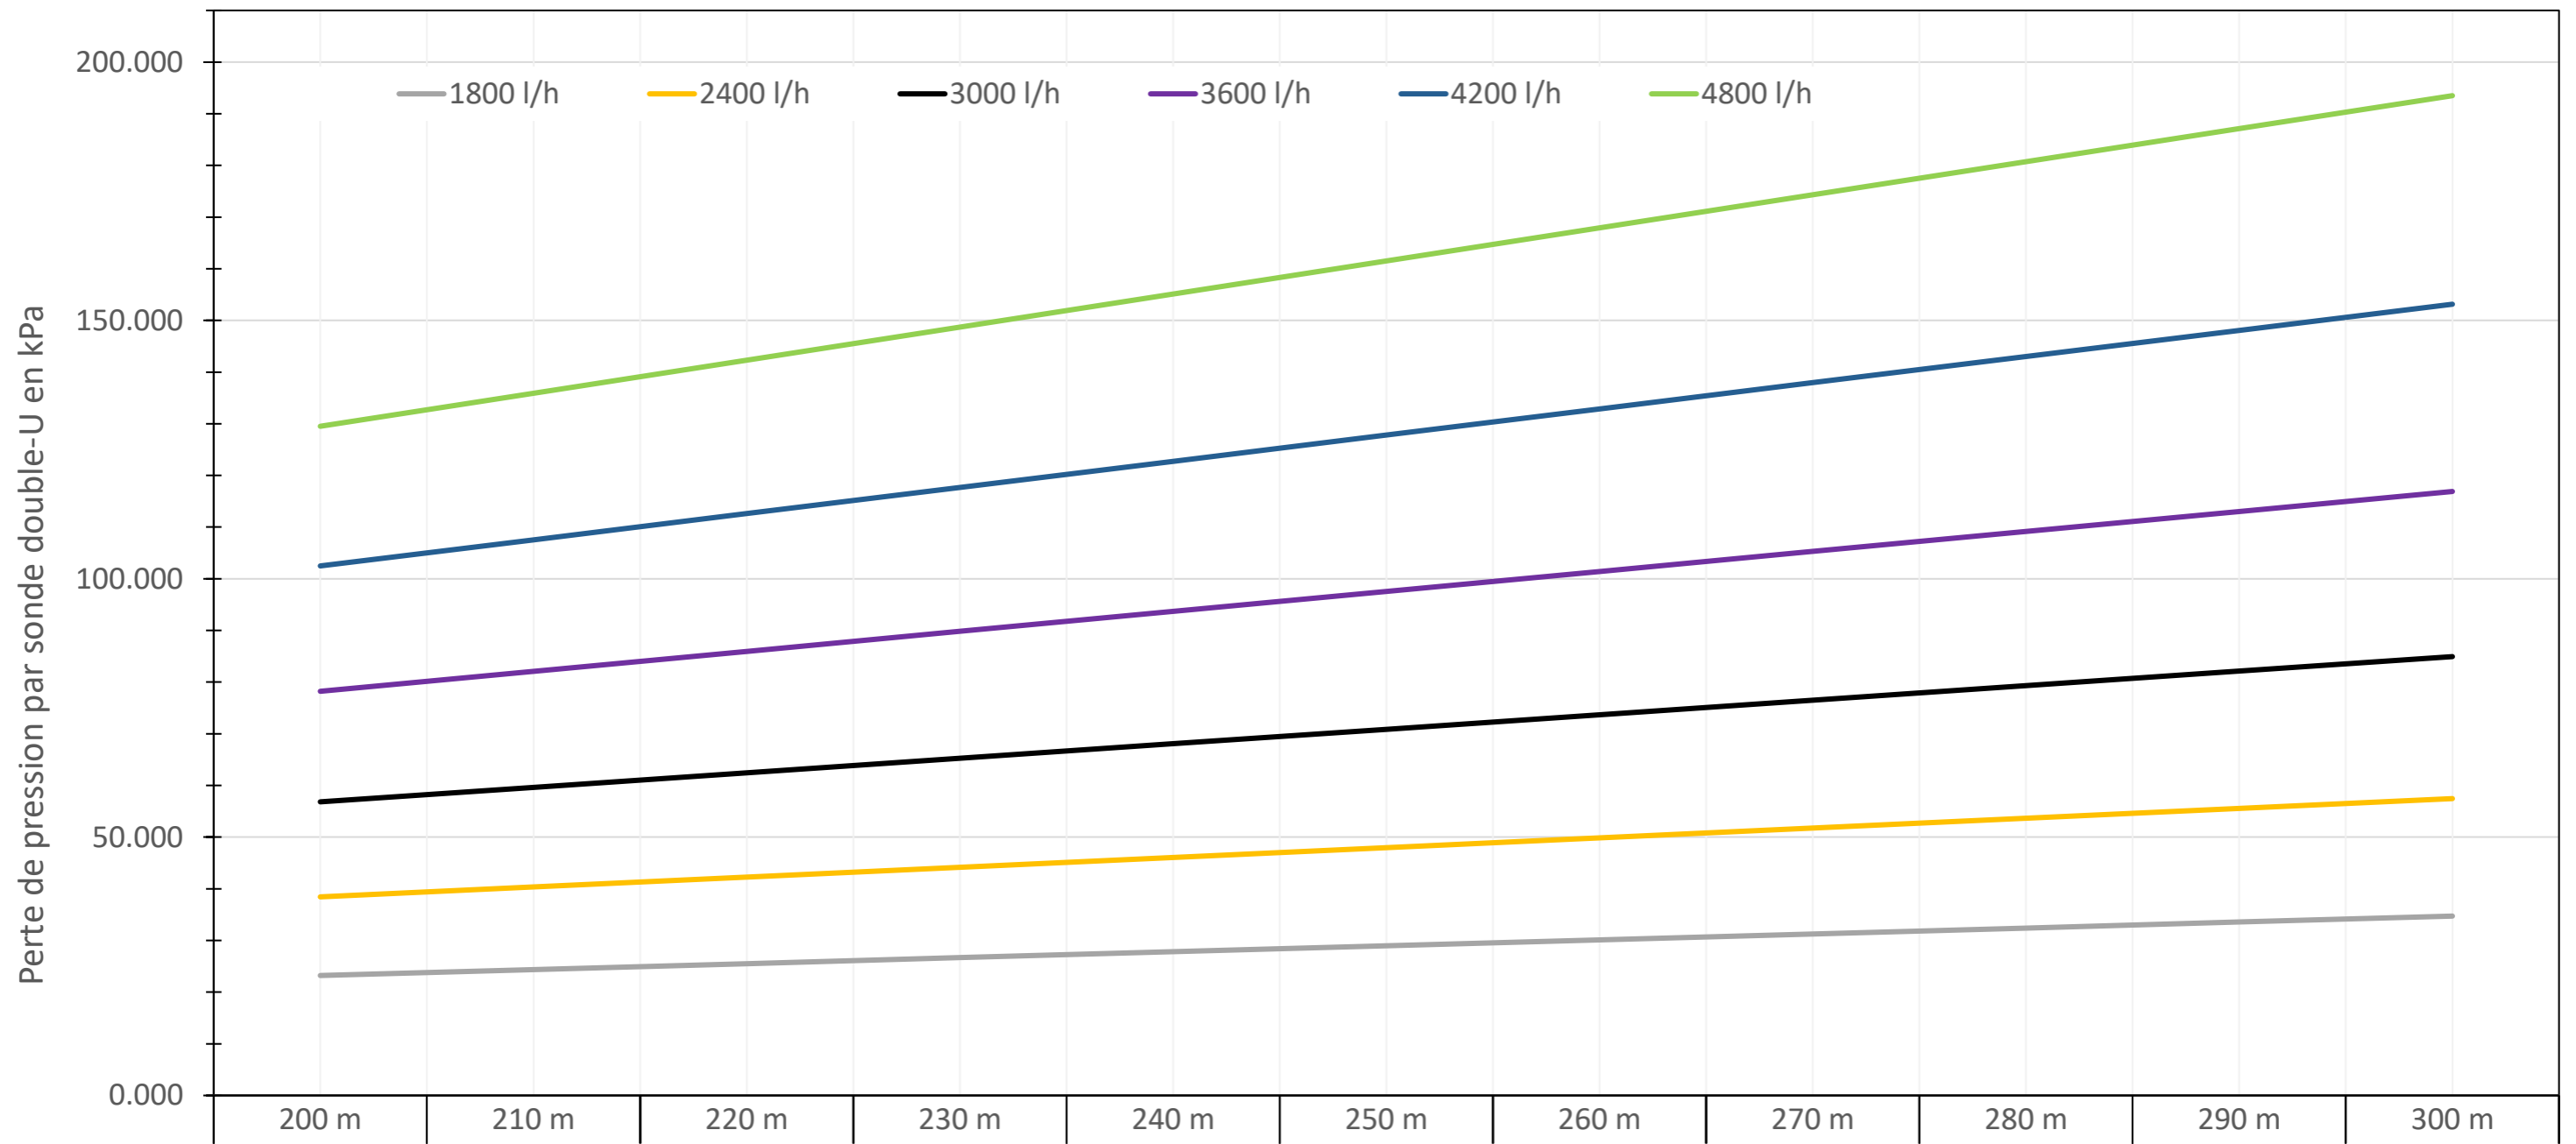

	200 m	210 m	220 m	230 m	240 m	250 m	260 m	270 m	280 m	290 m	300 m
Longueur de sonde											
— 1800 l/h	23.214	24.364	25.514	26.663	27.813	28.963	30.113	31.262	32.412	33.562	34.712
— 2400 l/h	38.433	40.335	42.237	44.139	46.041	47.944	49.846	51.748	53.650	55.552	57.454
— 3000 l/h	56.826	59.637	62.448	65.259	68.069	70.880	73.691	76.502	79.313	82.124	84.935
— 3600 l/h	78.222	82.090	85.957	89.824	93.692	97.559	101.426	105.293	109.161	113.028	116.895
— 4200 l/h	102.490	107.554	112.619	117.684	122.749	127.814	132.878	137.943	143.008	148.073	153.138
— 4800 l/h	129.520	135.918	142.316	148.714	155.112	161.510	167.908	174.307	180.705	187.103	193.501