


Perte de pression DUPLEX Ø 50 PN16 double-U (2 circuits en parallèle) avec de l'éthylène glycol 25% @ 0°C

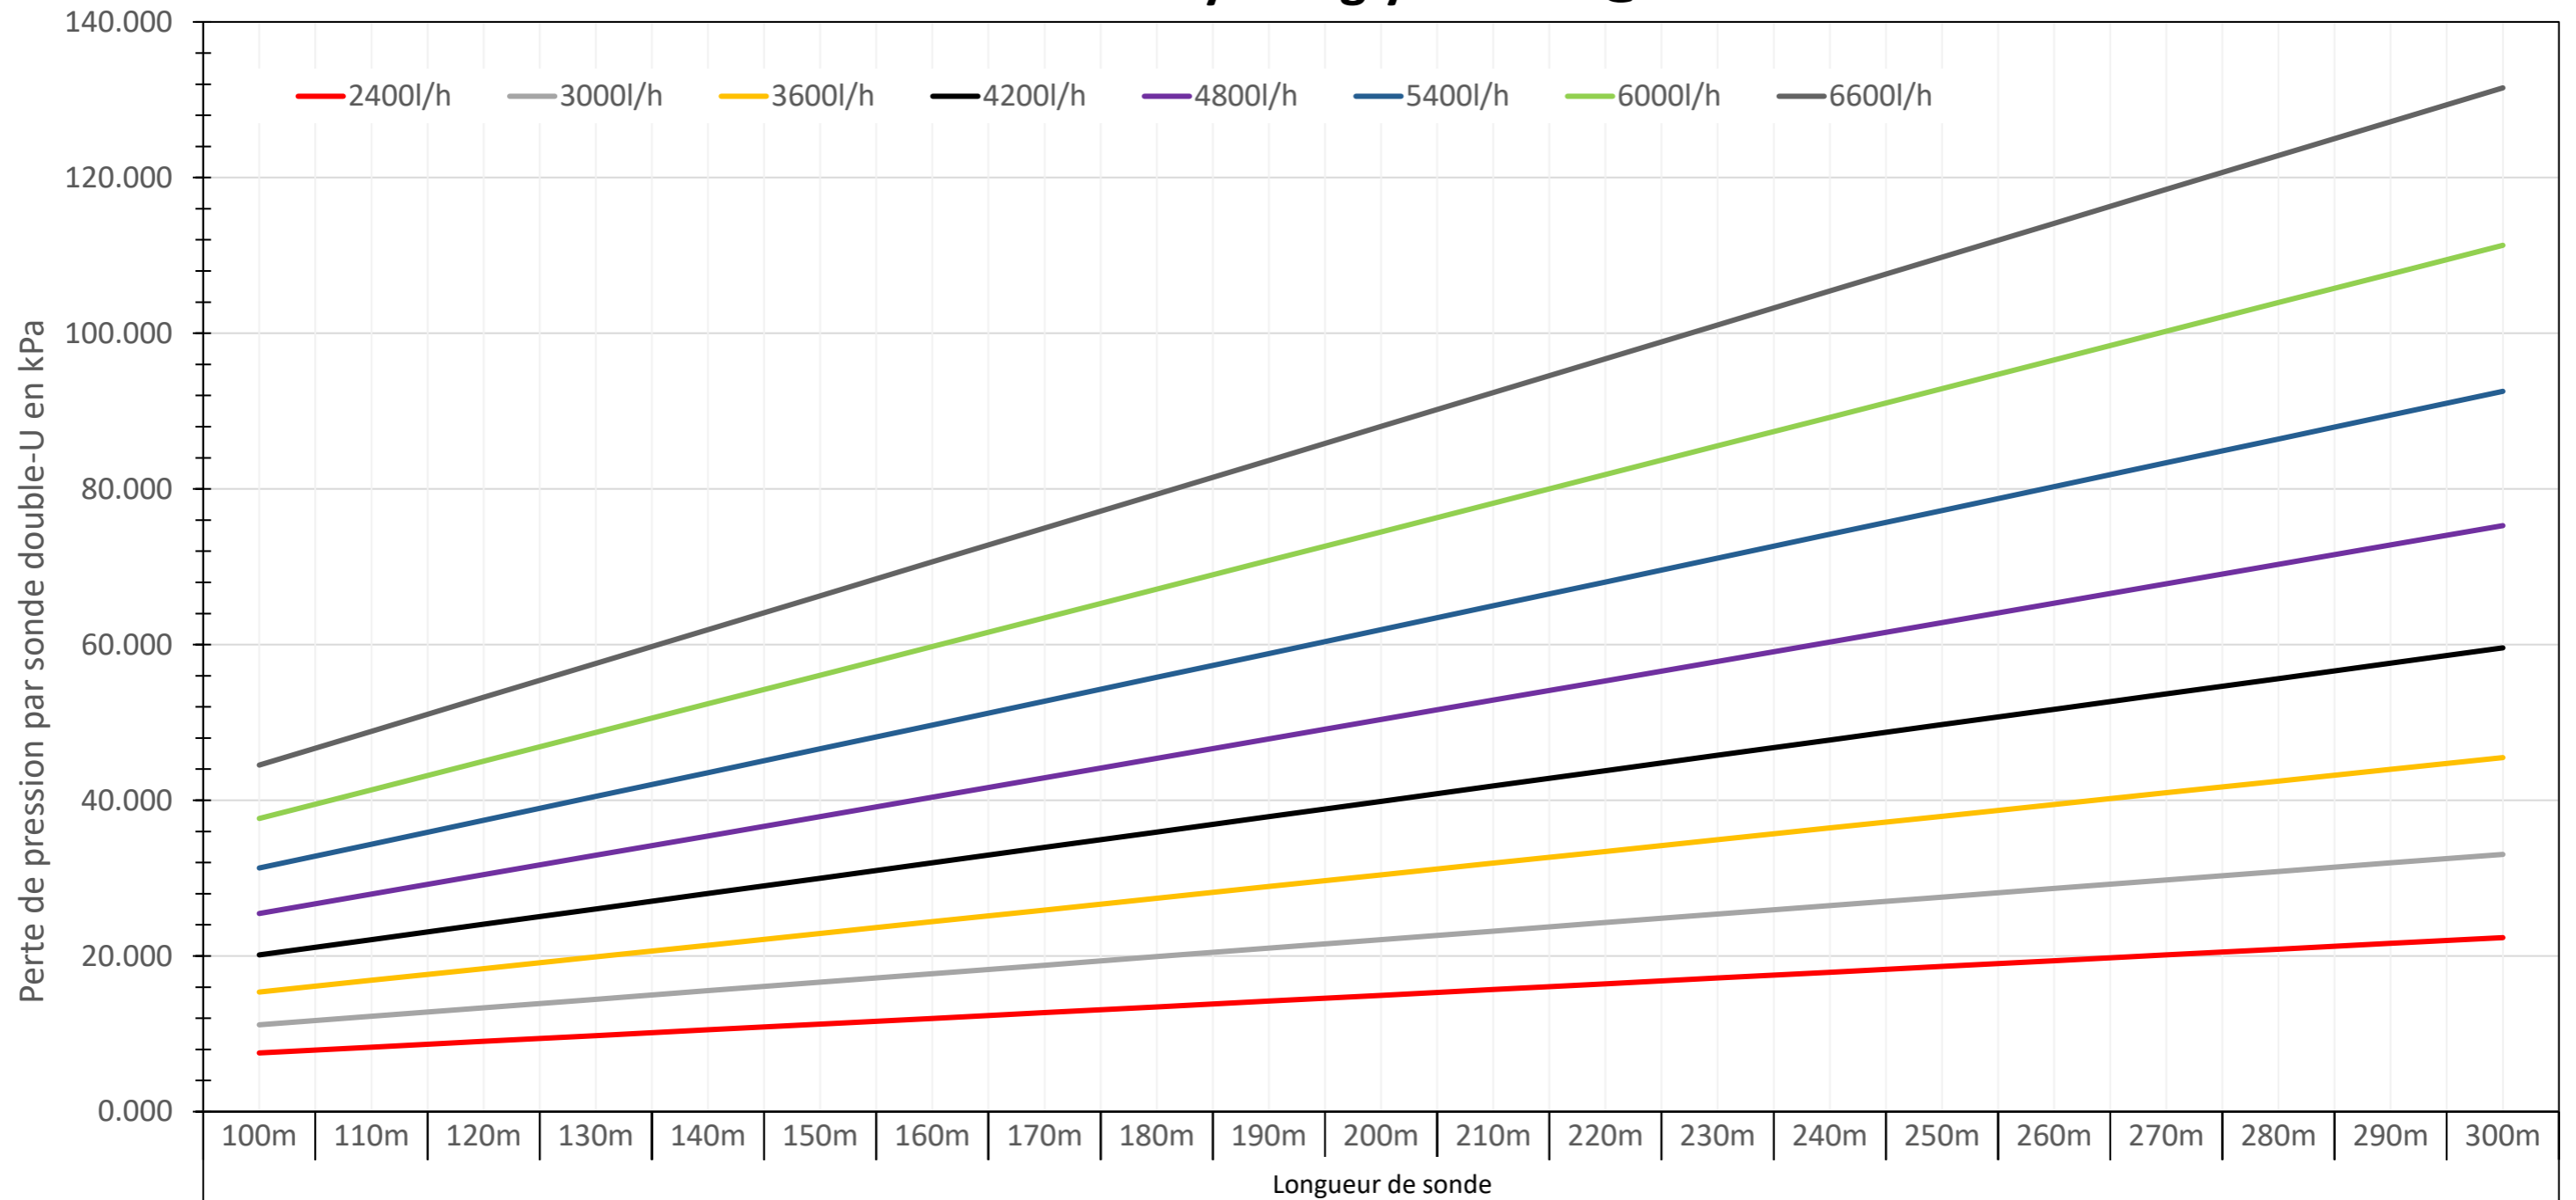

— 2400l/h	7.543	8.284	9.024	9.765	10.506	11.247	11.987	12.728	13.469	14.209	14.950	15.691	16.431	17.172	17.913	18.654	19.394	20.135	20.876	21.616	22.357
— 3000l/h	11.158	12.253	13.347	14.442	15.536	16.631	17.725	18.820	19.914	21.009	22.104	23.198	24.293	25.387	26.482	27.576	28.671	29.765	30.86	31.955	33.049
— 3600l/h	15.365	16.871	18.377	19.883	21.389	22.895	24.401	25.907	27.413	28.919	30.425	31.930	33.436	34.942	36.448	37.954	39.46	40.966	42.472	43.978	45.484
— 4200l/h	20.139	22.111	24.083	26.056	28.028	30.000	31.972	33.945	35.917	37.889	39.861	41.834	43.806	45.778	47.75	49.723	51.695	53.667	55.639	57.612	59.584
— 4800l/h	25.458	27.950	30.441	32.932	35.424	37.915	40.407	42.898	45.390	47.881	50.372	52.864	55.355	57.847	60.338	62.83	65.321	67.812	70.304	72.795	75.287
— 5400l/h	31.306	34.367	37.429	40.491	43.552	46.614	49.676	52.738	55.799	58.861	61.923	64.984	68.046	71.108	74.17	77.231	80.293	83.355	86.416	89.478	92.54
— 6000l/h	37.666	41.348	45.030	48.711	52.393	56.074	59.756	63.438	67.119	70.801	74.483	78.164	81.846	85.527	89.209	92.891	96.572	100.25	103.94	107.62	111.3
— 6600l/h	44.527	48.877	53.227	57.577	61.927	66.277	70.627	74.976	79.326	83.676	88.026	92.376	96.726	101.07	105.43	109.78	114.13	118.48	122.83	127.18	131.53