


Perte de pression **FLUX** Ø43 jusqu'à PN32 double-U (2 circuits en parallèle)
avec de l'éthylène glycol 25% @ 0°C

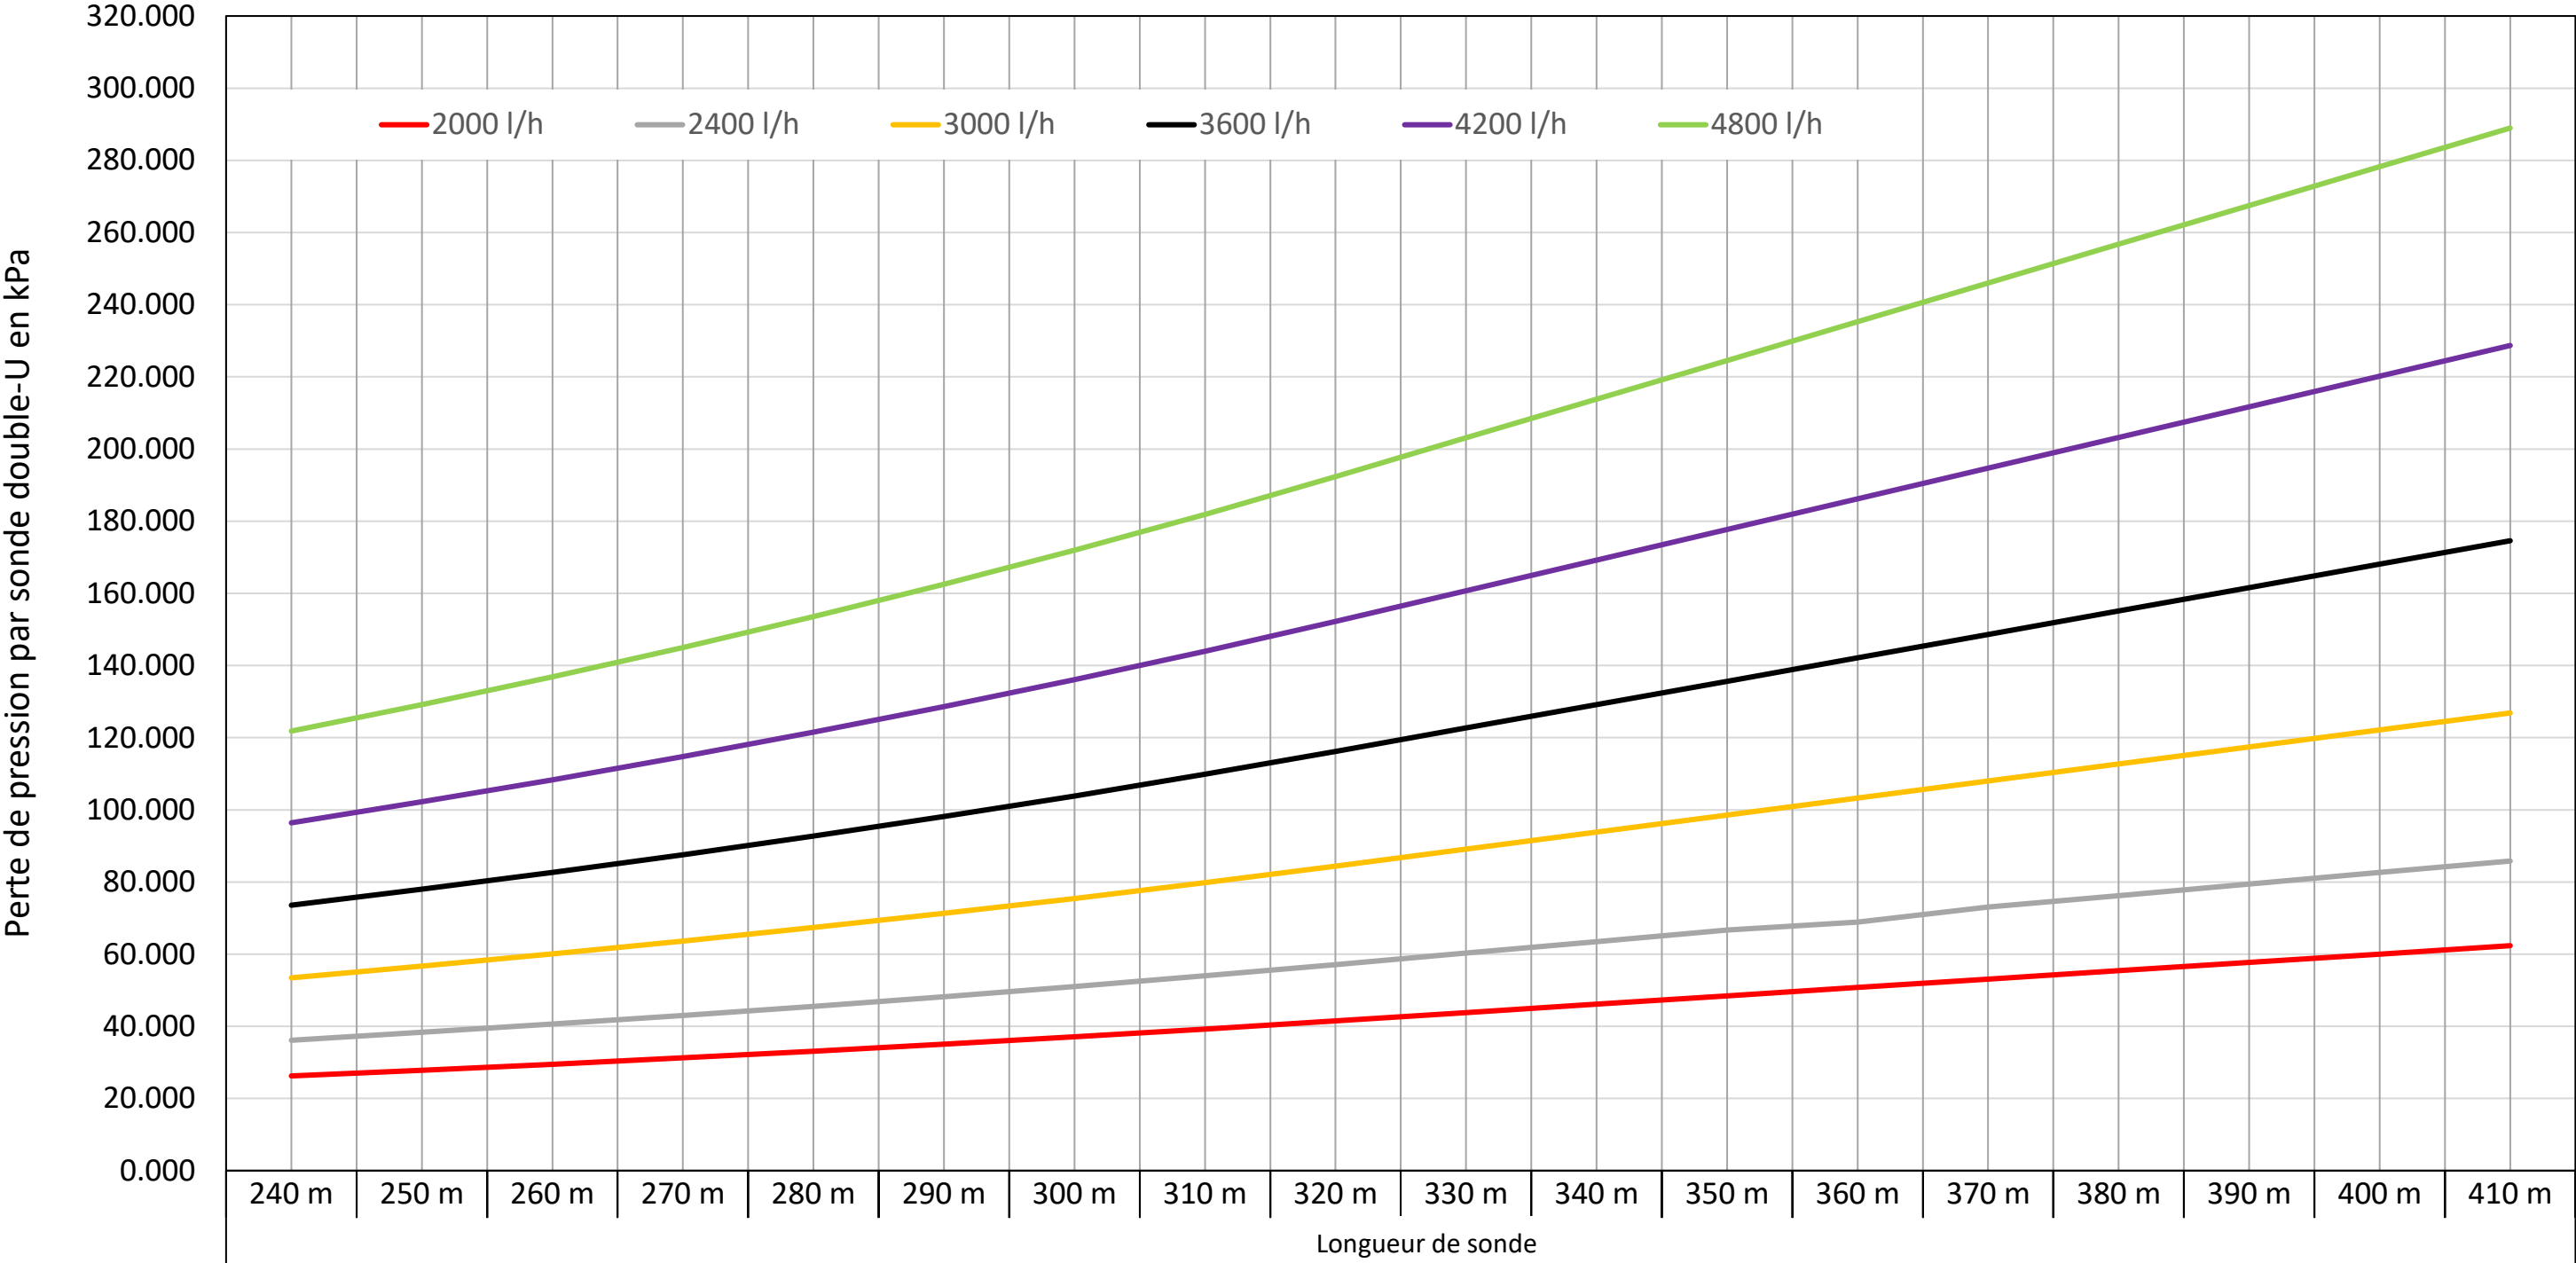

	240 m	250 m	260 m	270 m	280 m	290 m	300 m	310 m	320 m	330 m	340 m	350 m	360 m	370 m	380 m	390 m	400 m	410 m
2000 l/h	26.258	27.845	29.512	31.263	33.104	35.040	37.078	39.223	41.484	43.803	46.123	48.442	50.762	53.081	55.401	57.720	60.040	62.359
2400 l/h	36.145	38.328	40.622	43.031	45.564	48.229	51.033	53.985	57.096	60.287	63.478	66.670	68.861	73.052	76.243	79.434	82.626	85.817
3000 l/h	53.445	56.673	60.062	63.624	67.368	71.306	75.450	79.814	84.411	89.127	93.843	98.559	103.274	107.990	112.706	117.421	122.137	126.853
3600 l/h	73.572	78.013	82.678	87.578	92.730	98.149	103.852	109.857	116.183	122.671	129.159	135.647	142.135	148.623	155.111	161.599	168.087	174.576
4200 l/h	96.400	102.218	108.327	114.746	121.494	128.592	136.062	143.927	152.214	160.711	169.208	177.705	186.202	194.699	203.196	211.693	220.190	228.688
4800 l/h	121.829	129.178	136.897	145.007	153.532	162.500	171.937	181.874	192.343	203.077	213.811	224.545	235.279	246.013	256.747	267.481	278.215	288.948