


Perte de pression **FLUX** Ø43 jusqu'à PN32 double-U (2 circuits en parallèle)
avec de l'eau à @ 15°C

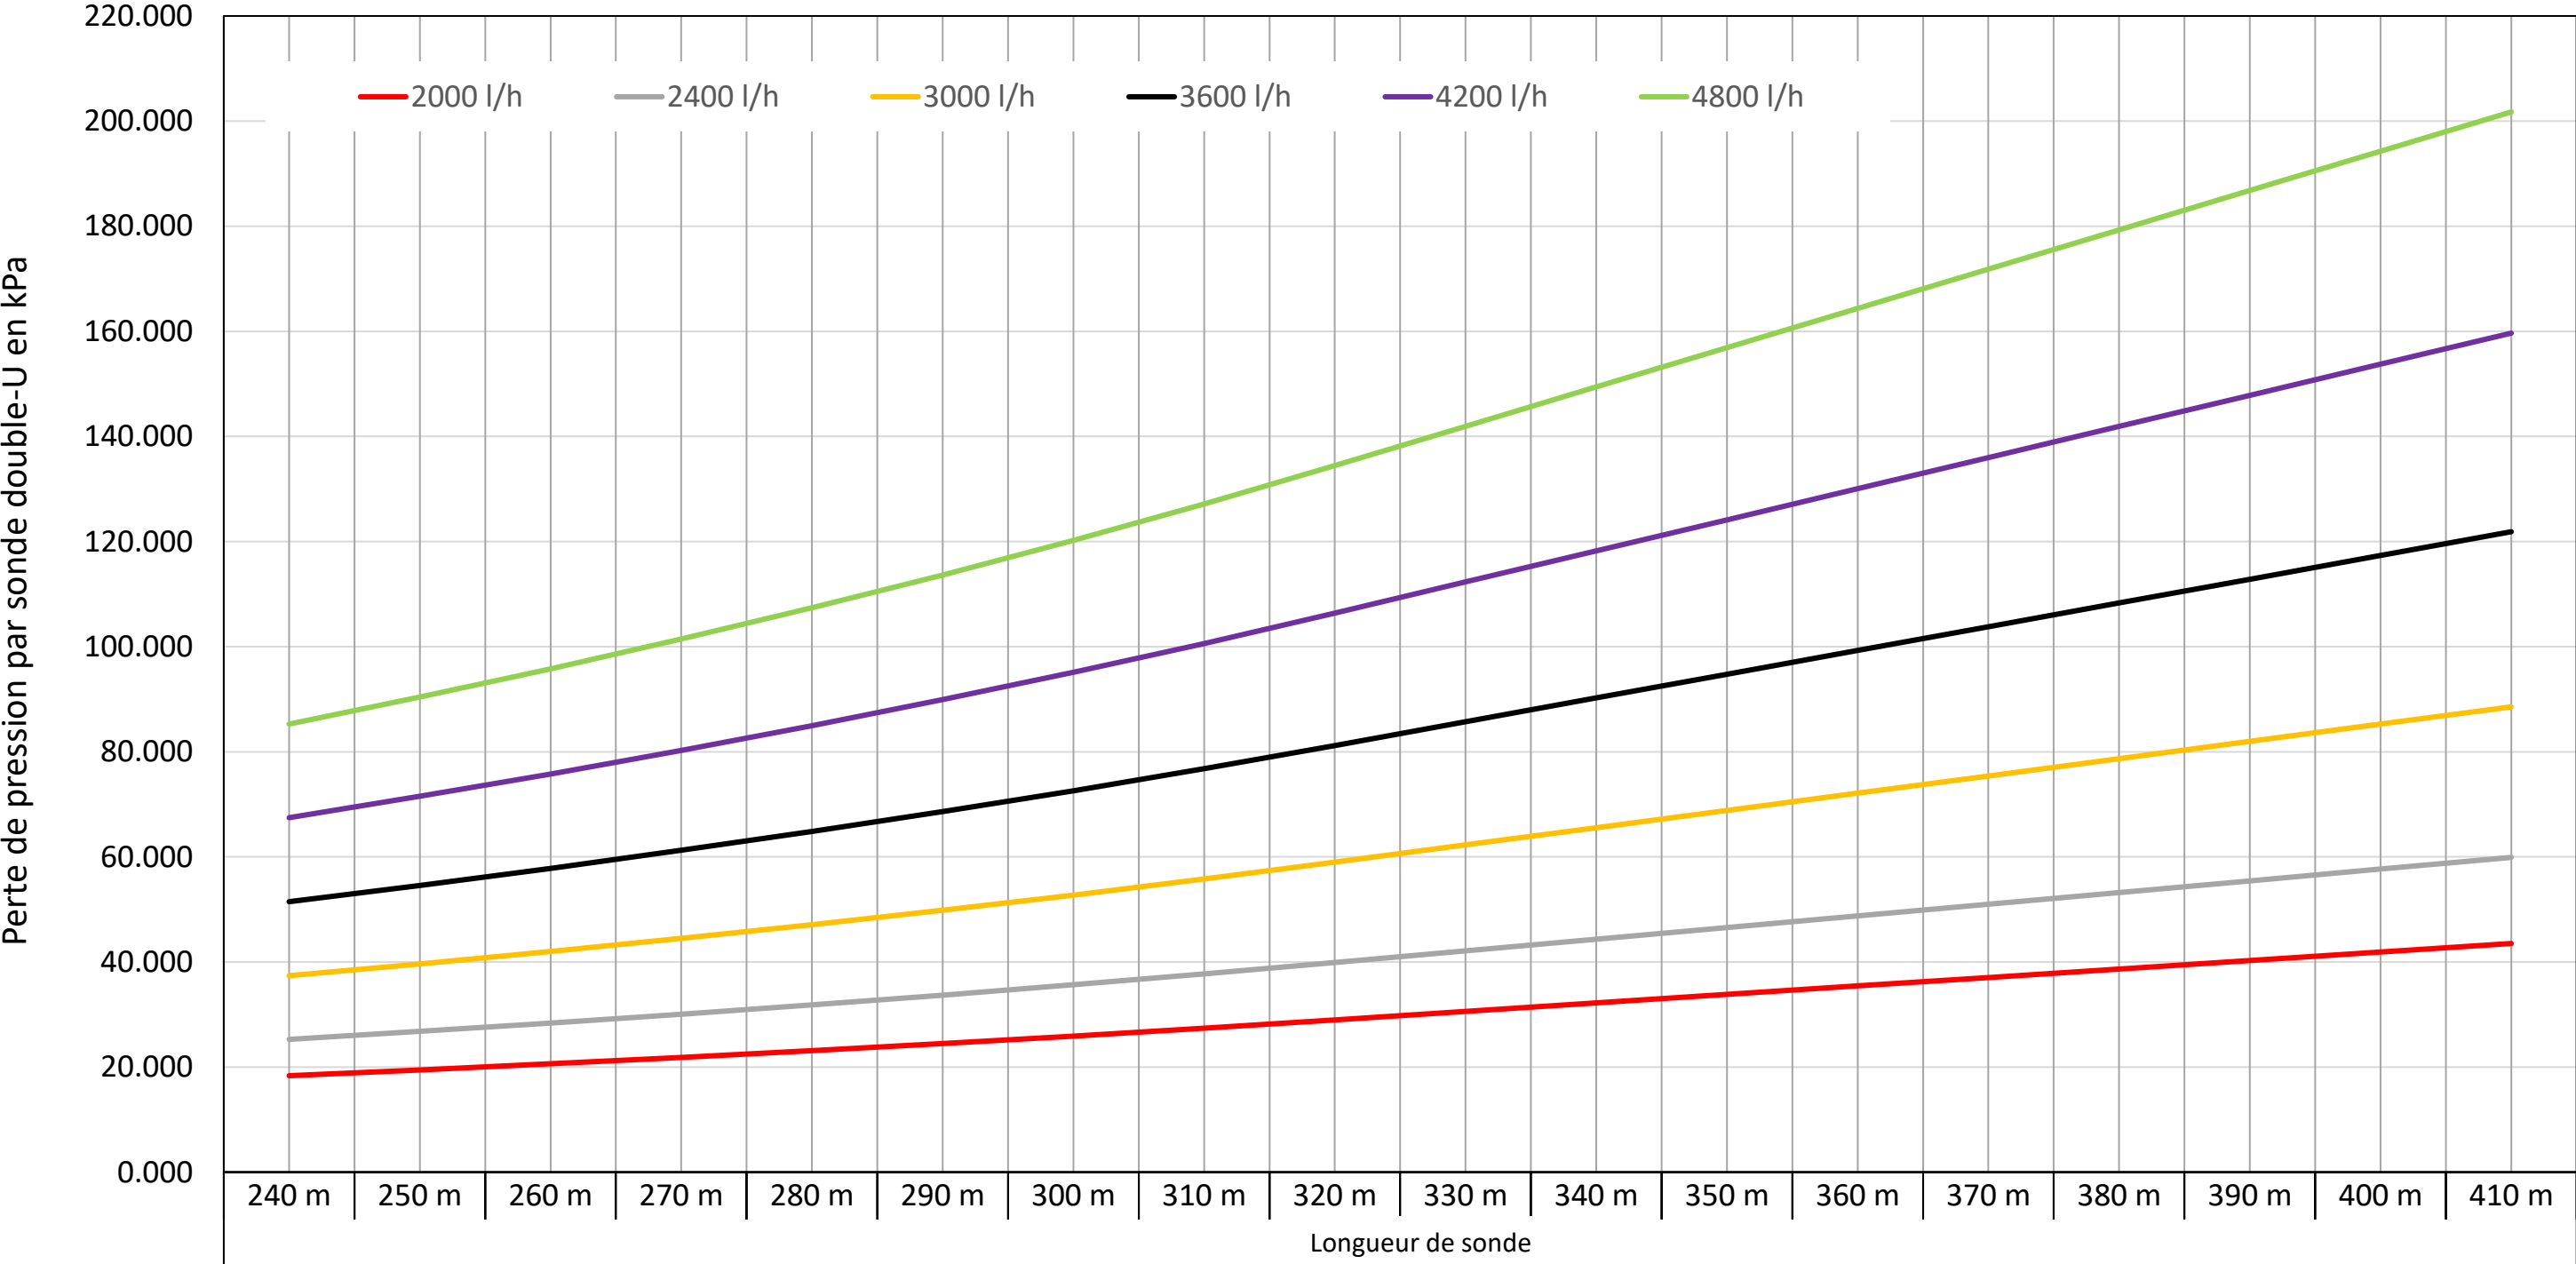

2000 l/h	18.361	19.467	20.630	21.851	23.134	24.484	25.905	27.402	28.978	30.594	32.209	33.825	35.440	37.056	38.671	40.287	41.902	43.518
2400 l/h	25.278	26.801	28.400	30.081	31.847	33.705	35.661	37.720	39.889	42.112	44.334	46.557	48.780	51.002	53.225	55.448	57.671	59.893
3000 l/h	37.387	39.637	42.001	44.485	47.096	49.842	52.733	55.776	58.982	62.267	65.551	68.836	72.121	75.405	78.690	81.974	85.259	88.543
3600 l/h	51.476	54.573	57.826	61.244	64.837	68.617	72.594	76.782	81.194	85.714	90.233	94.752	99.271	103.790	108.309	112.828	117.347	121.866
4200 l/h	67.460	71.517	75.778	80.255	84.962	89.913	95.122	100.608	106.388	112.307	118.225	124.143	130.062	135.980	141.899	147.817	153.735	159.654
4800 l/h	85.268	90.394	95.778	101.435	107.381	113.636	120.218	127.150	134.452	141.929	149.405	156.881	164.358	171.834	179.310	186.787	194.263	201.739