


Perte de pression **FLUX** Ø53 jusqu'à PN38 double-U (2 circuits en parallèle) avec de l'éthylène glycol 25% @ 0°C

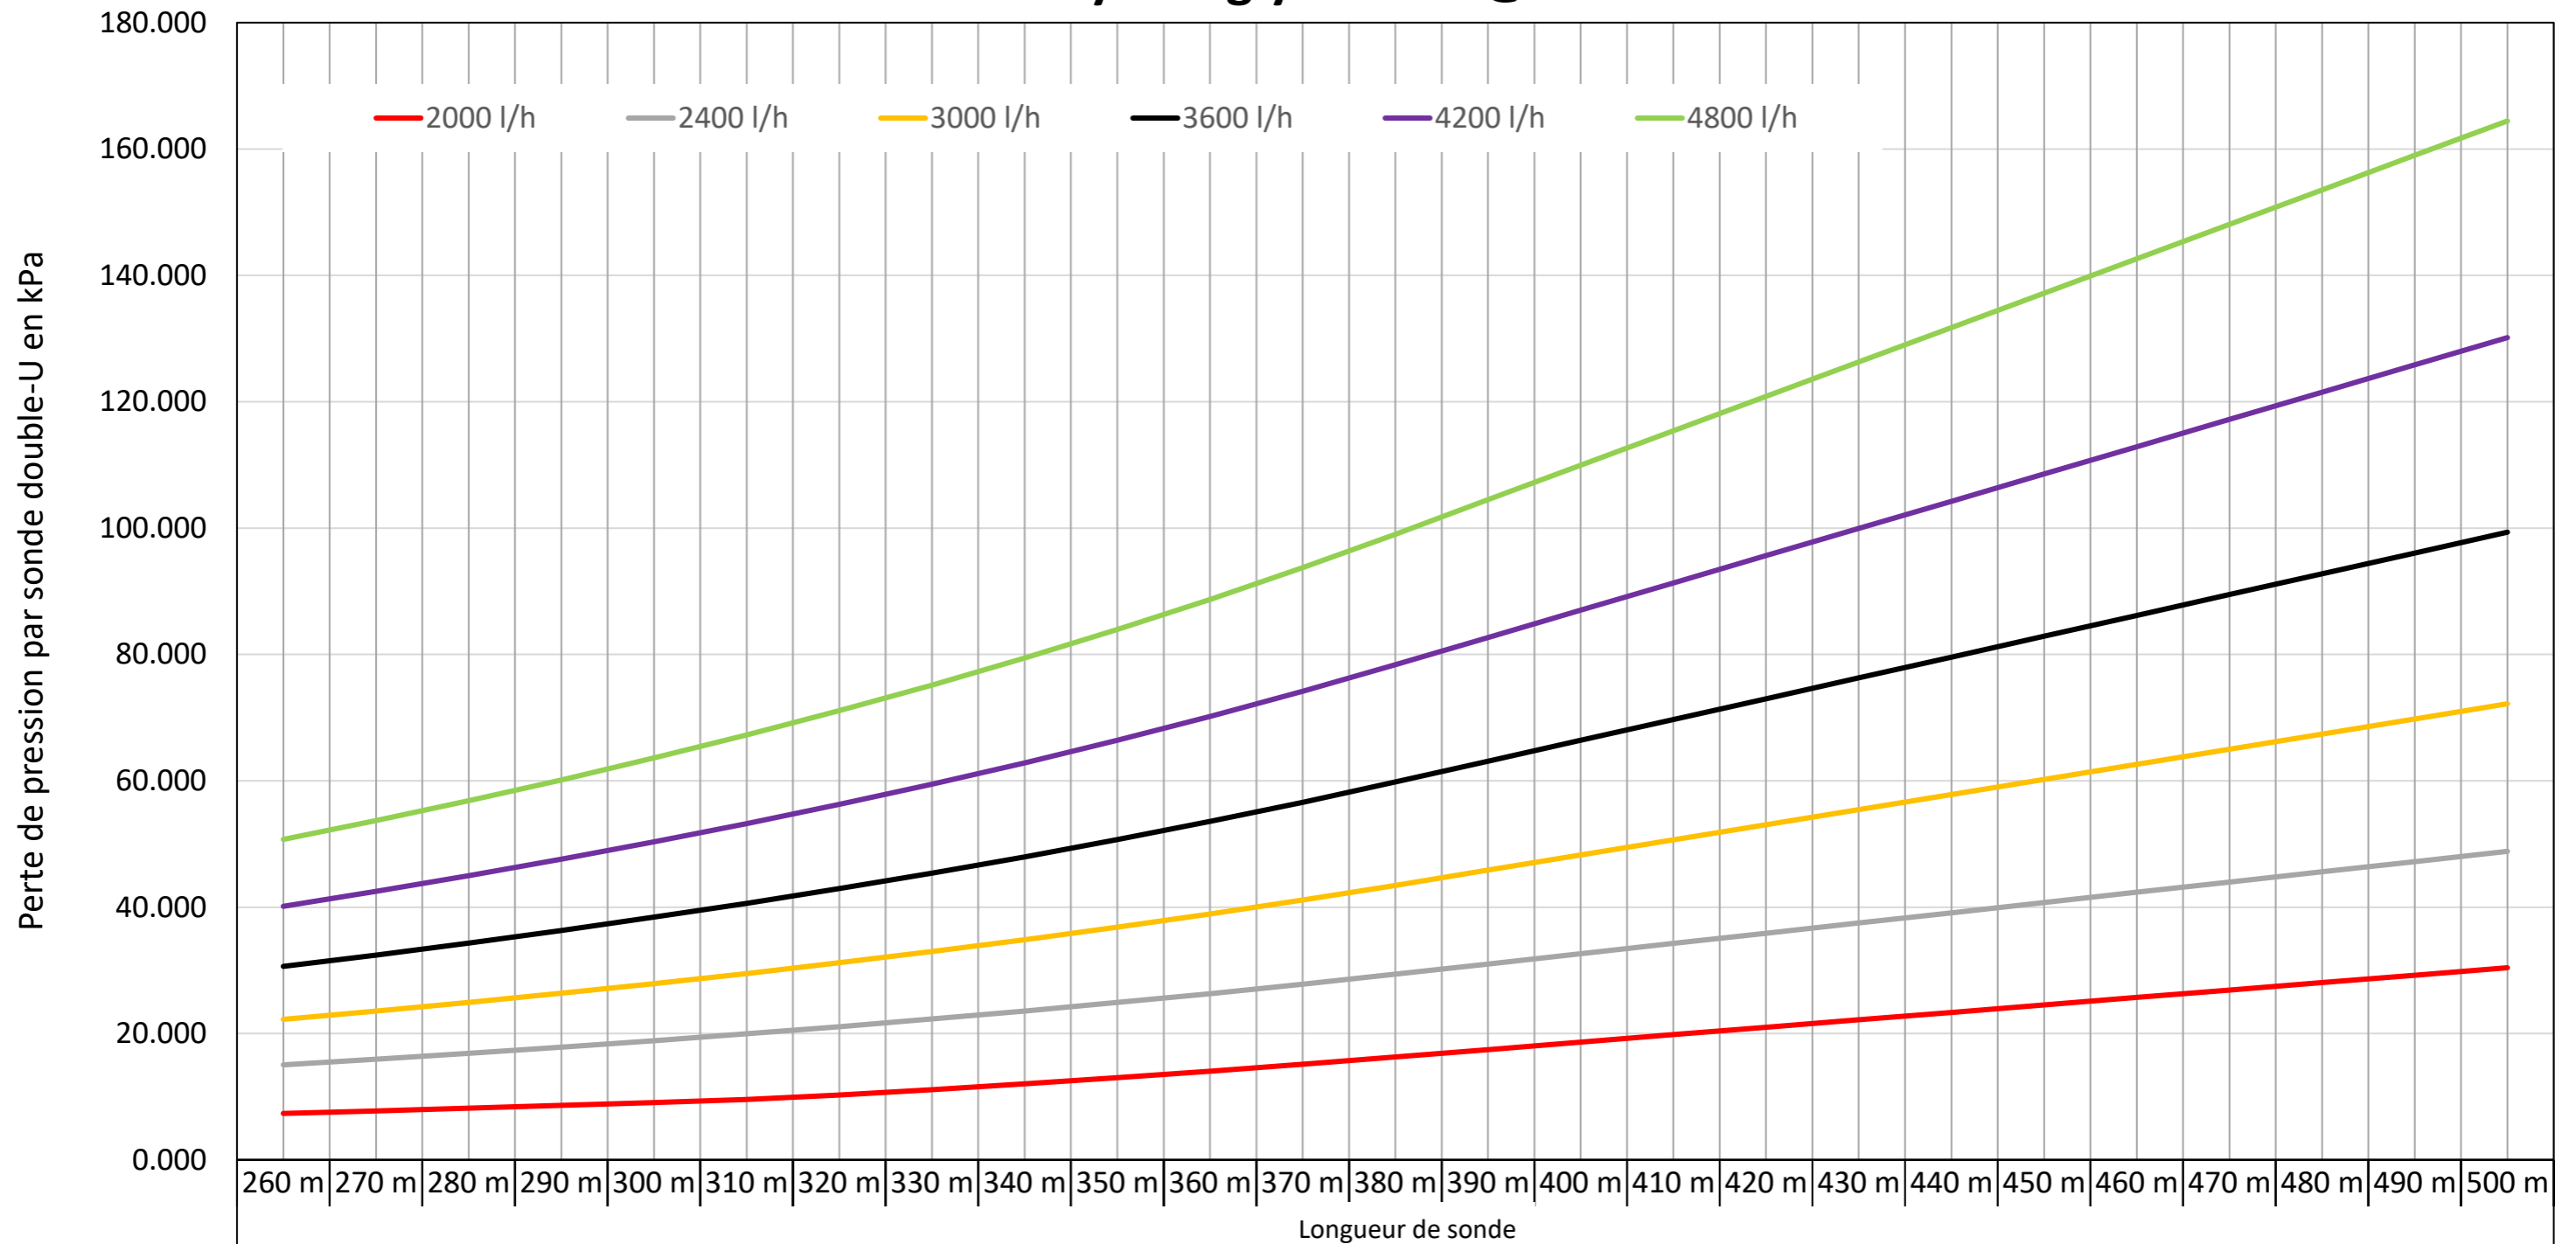

	260 m	270 m	280 m	290 m	300 m	310 m	320 m	330 m	340 m	350 m	360 m	370 m	380 m	390 m	400 m	410 m	420 m	430 m	440 m	450 m	460 m	470 m	480 m	490 m	500 m
2000 l/h	7.350	7.753	8.174	8.613	9.072	9.550	10.25	11.12	12.04	13.02	14.04	15.13	16.27	17.45	18.63	19.81	20.99	22.16	23.34	24.52	25.70	26.88	28.05	29.23	30.41
2400 l/h	15.04	15.92	16.86	17.83	18.87	19.95	21.09	22.30	23.56	24.90	26.32	27.81	29.39	31.01	32.63	34.25	35.87	37.49	39.12	40.74	42.36	43.98	45.6	47.22	48.84
3000 l/h	22.24	23.55	24.93	26.38	27.90	29.50	31.19	32.97	34.84	36.82	38.91	41.12	43.45	45.85	48.24	50.63	53.03	55.42	57.82	60.22	62.61	65.01	67.4	69.8	72.19
3600 l/h	30.62	32.42	34.32	36.31	38.41	40.61	42.94	45.39	47.97	50.69	53.56	56.60	59.81	63.10	66.40	69.69	72.99	76.28	79.58	82.88	86.17	89.47	92.76	96.06	99.35
4200 l/h	40.13	42.49	44.97	47.58	50.33	53.22	56.26	59.47	62.85	66.42	70.18	74.16	78.36	82.68	86.99	91.31	95.62	99.94	104.3	108.6	112.9	117.2	121.5	125.8	130.1
4800 l/h	50.72	53.71	56.84	60.14	63.61	67.26	71.10	75.15	79.43	83.93	88.69	93.71	99.02	104.4	109.9	115.3	120.8	126.2	131.7	137.2	142.6	148.1	153.5	159	164.4