


Perte de pression **FLUX** Ø53 jusqu'à PN38 double-U (2 circuits en parallèle)
avec de l'eau à @ 15°C

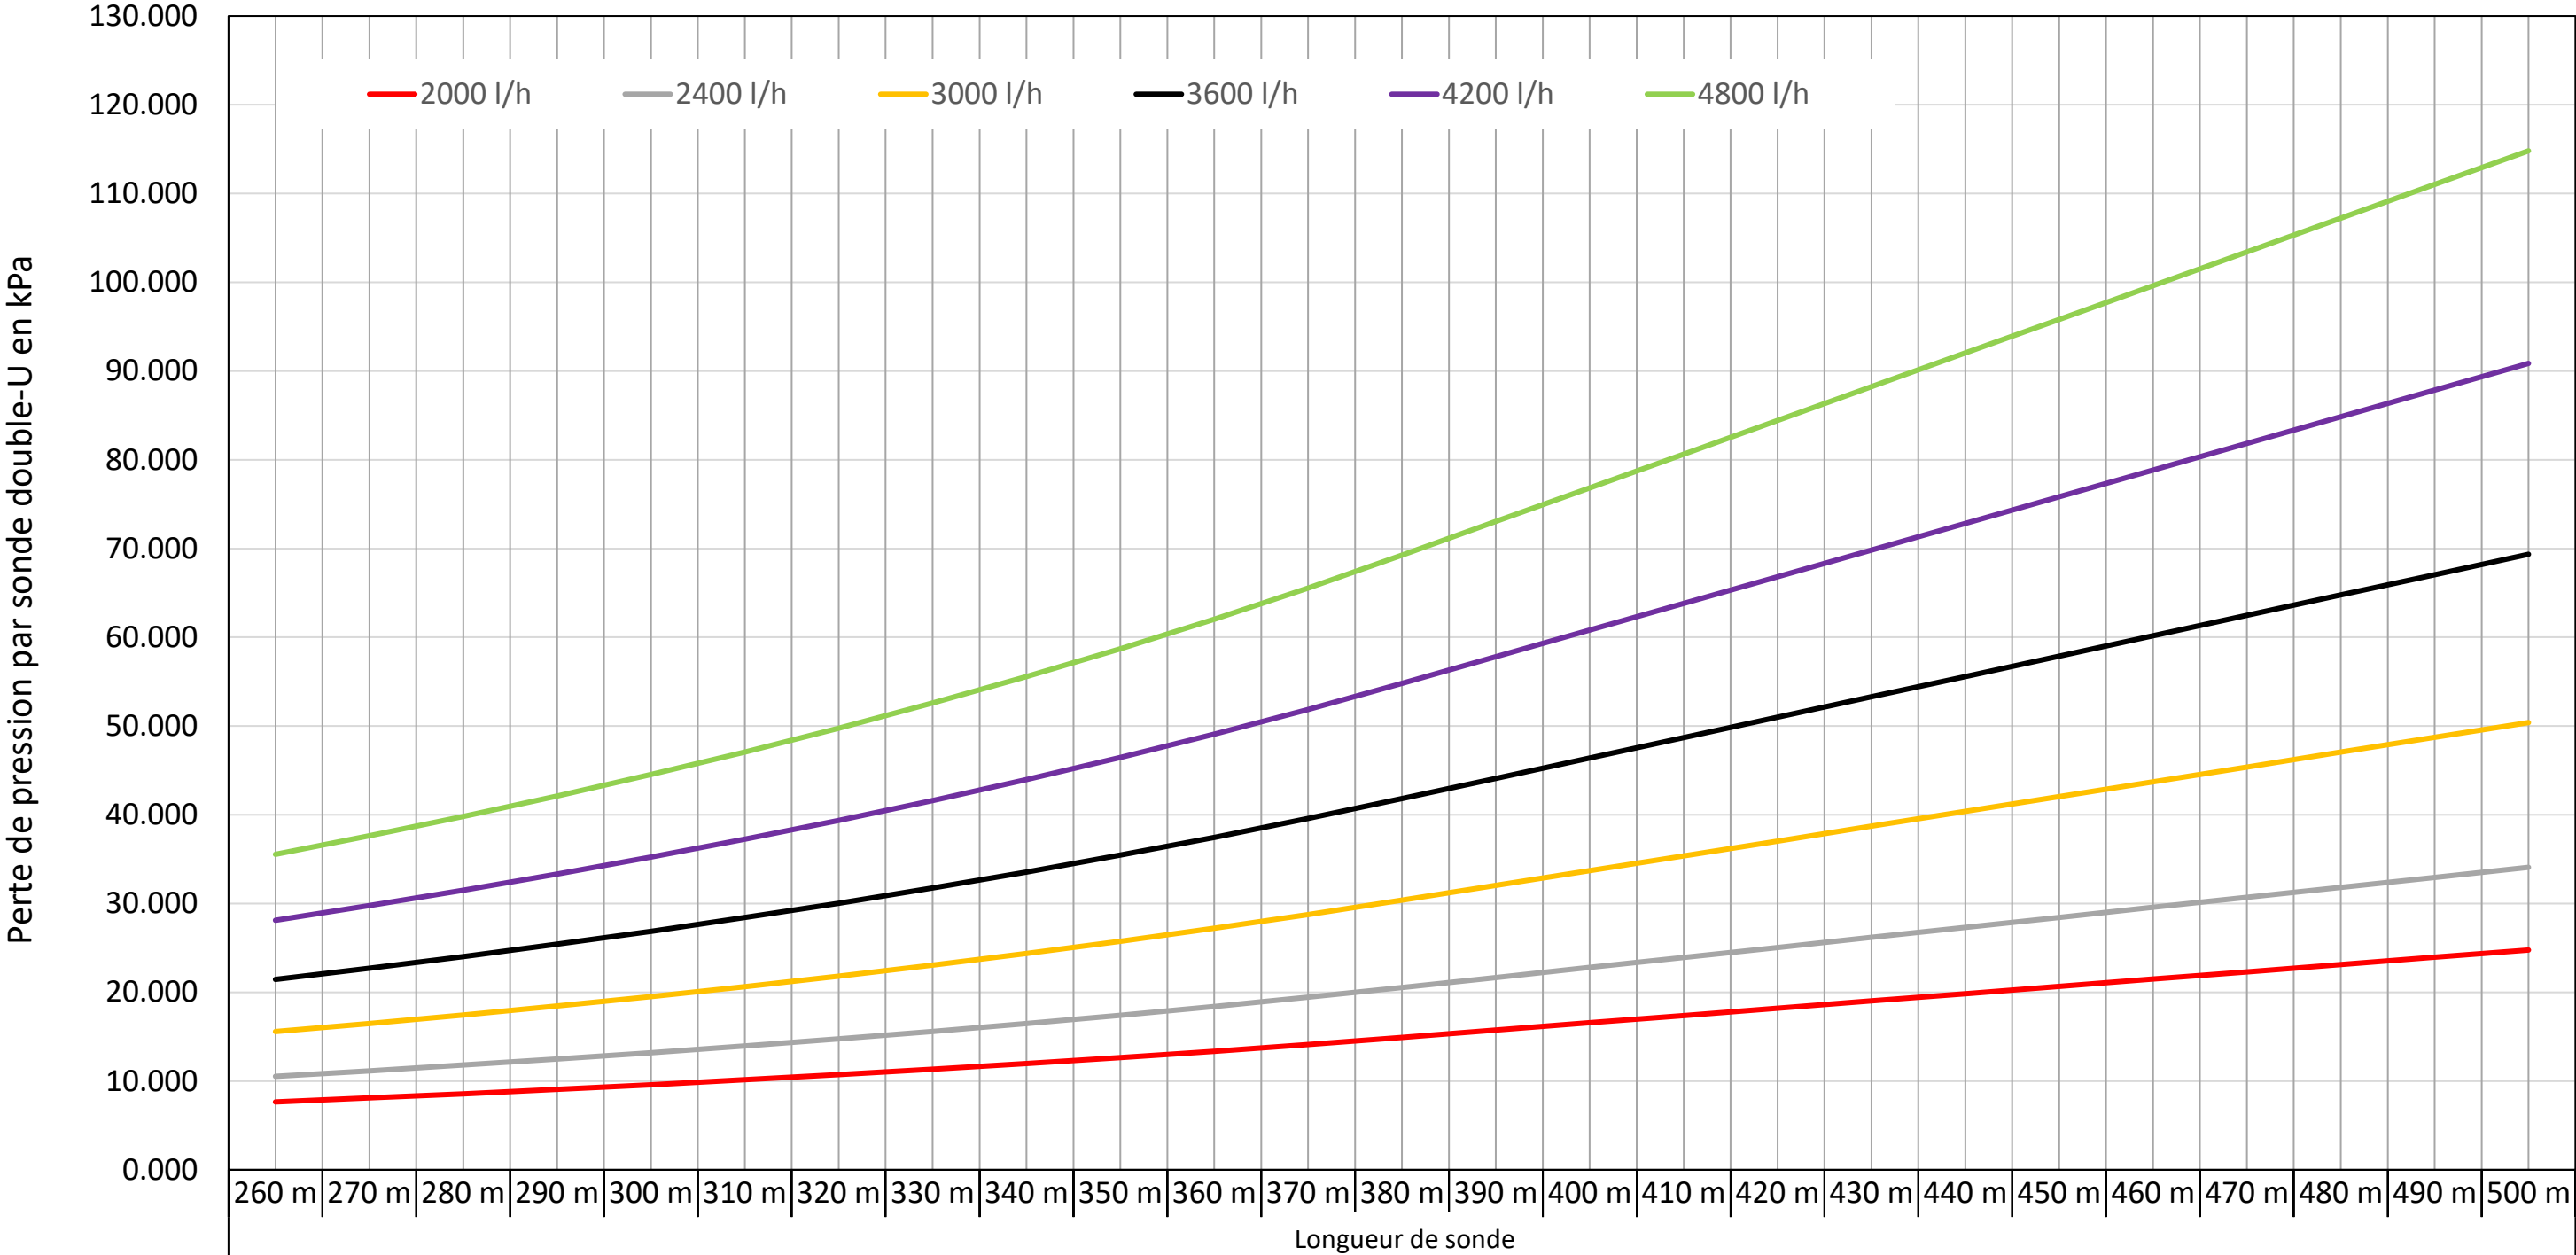

2000 l/h	7.647	8.097	8.569	9.066	9.588	10.13	10.71	11.32	11.97	12.64	13.36	14.12	14.92	15.74	16.56	17.38	18.20	19.02	19.84	20.66	21.48	22.31	23.13	23.95	24.77
2400 l/h	10.53	11.14	11.79	12.48	13.20	13.95	14.75	15.59	16.47	17.41	18.39	19.43	20.54	21.66	22.79	23.92	25.05	26.18	27.31	28.44	29.57	30.7	31.83	32.96	34.09
3000 l/h	15.57	16.49	17.45	18.46	19.52	20.64	21.82	23.06	24.37	25.75	27.20	28.74	30.37	32.04	33.71	35.37	37.04	38.71	40.38	42.05	43.72	45.39	47.05	48.72	50.39
3600 l/h	21.45	22.71	24.03	25.42	26.88	28.42	30.04	31.75	33.55	35.45	37.45	39.57	41.81	44.10	46.40	48.69	50.99	53.28	55.58	57.88	60.17	62.47	64.76	67.06	69.35
4200 l/h	28.11	29.76	31.49	33.31	35.23	37.25	39.37	41.61	43.96	46.45	49.08	51.85	54.79	57.79	60.80	63.80	66.81	69.81	72.82	75.83	78.84	81.84	84.85	87.85	90.86
4800 l/h	35.54	37.62	39.81	42.11	44.53	47.08	49.76	52.59	55.57	58.71	62.03	65.54	69.24	73.04	76.84	80.63	84.43	88.23	92.03	95.82	99.62	103.4	107.2	111	114.8