


Perte de pression **VARIO** Ø 40 jusqu'à PN20 double-U (2 circuits en parallèle)
avec de l'éthylène glycol 25% @ 0°C

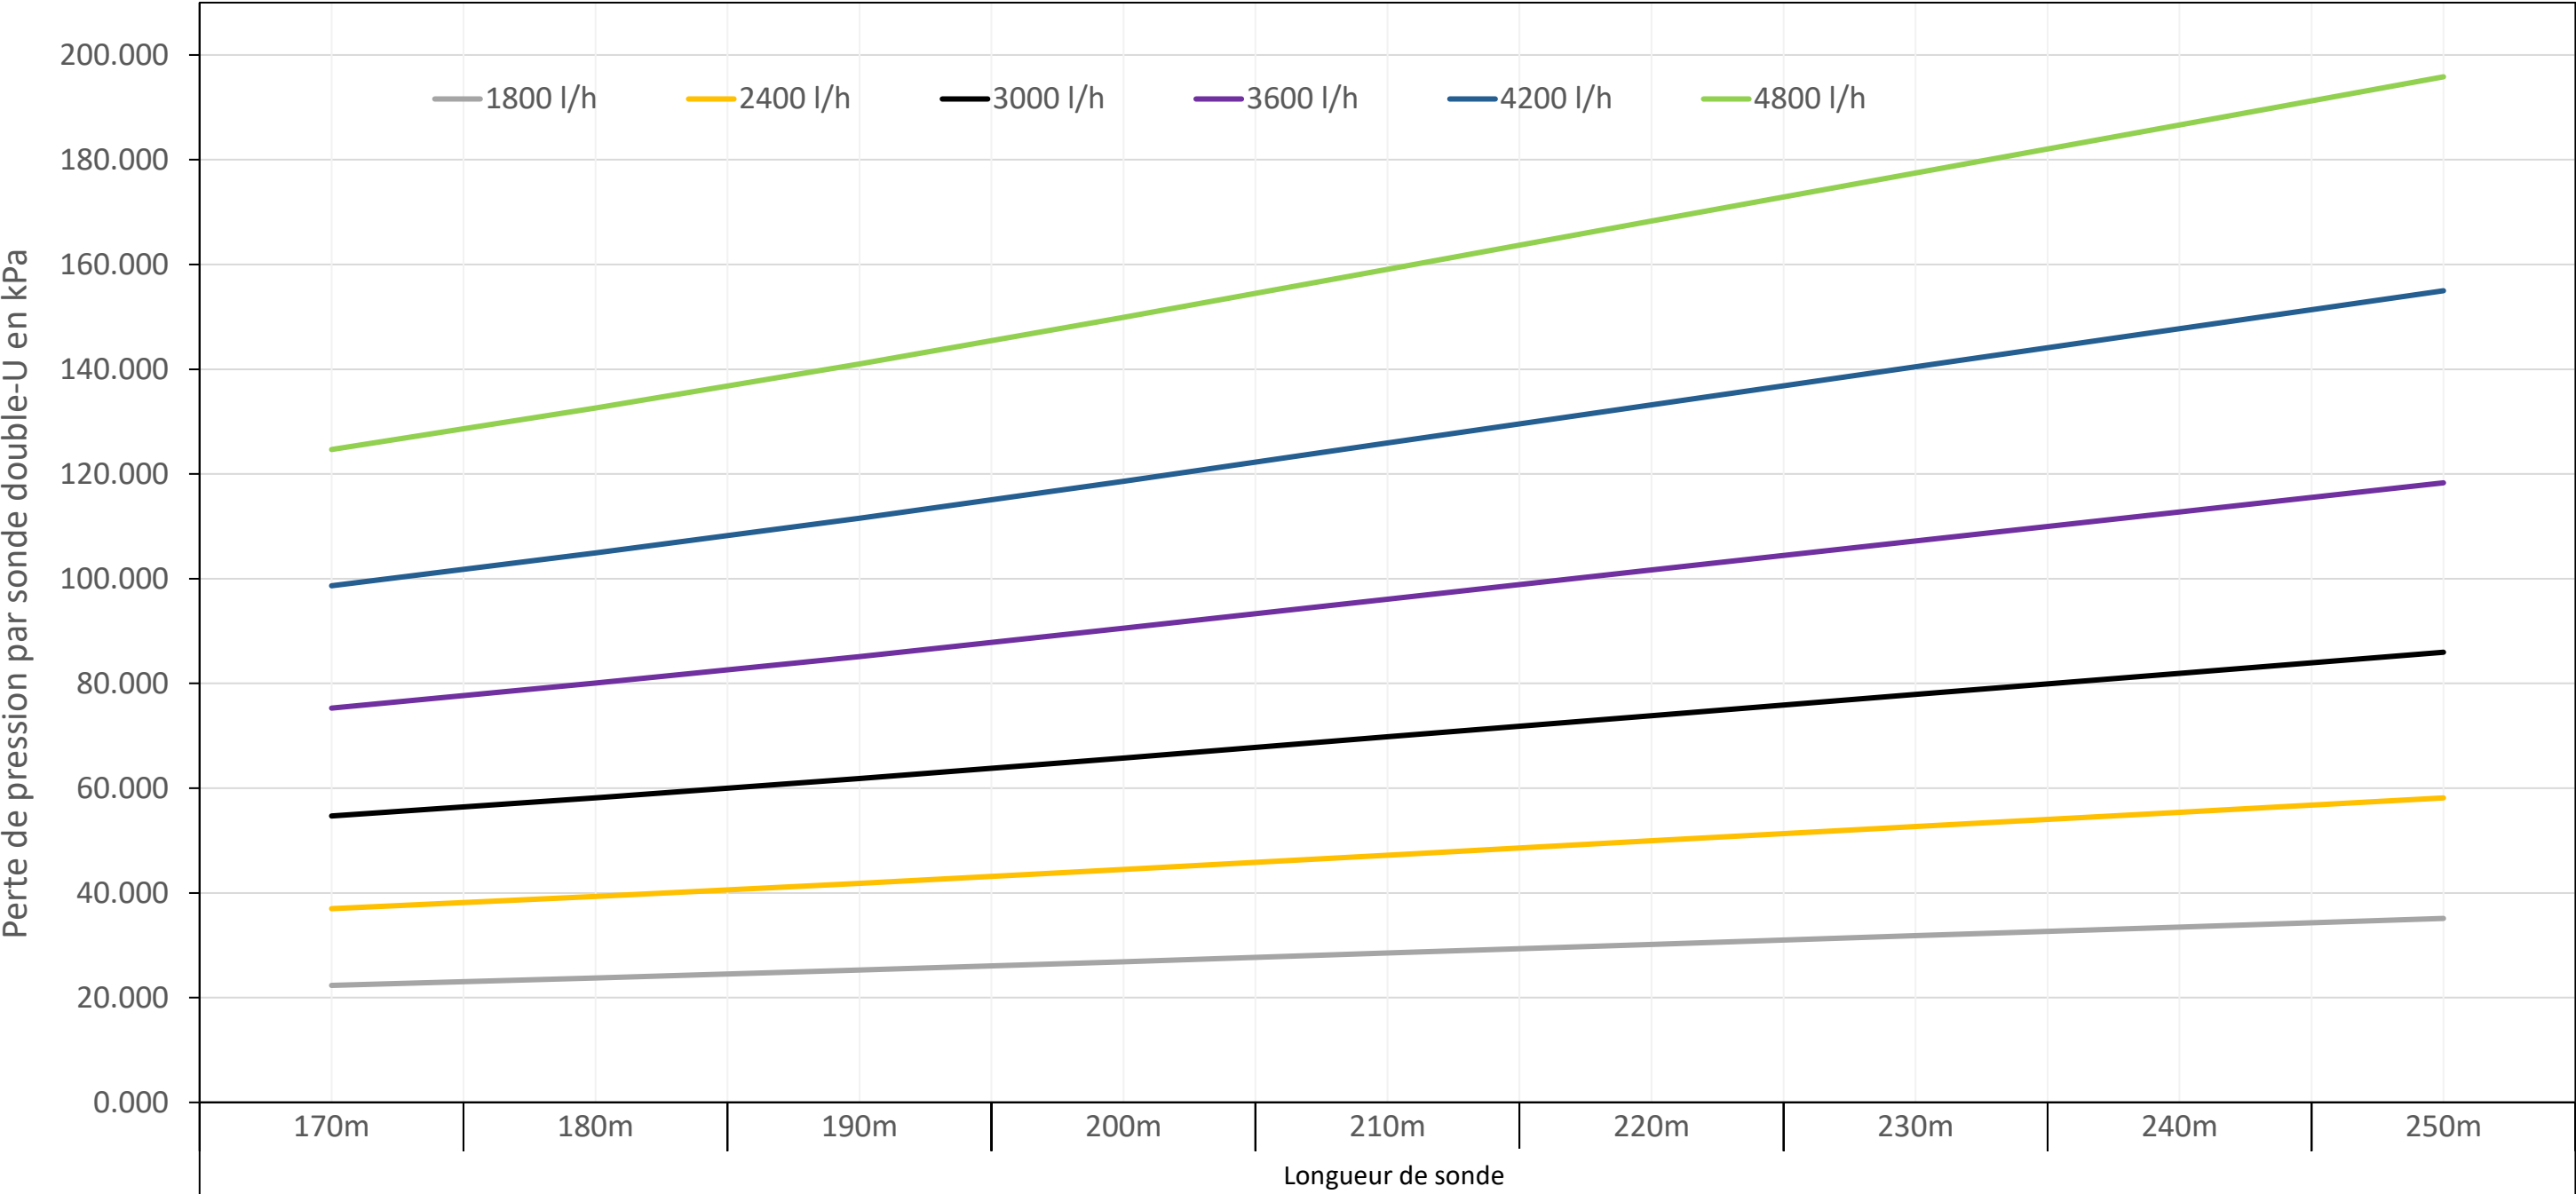

	170m	180m	190m	200m	210m	220m	230m	240m	250m
1800 l/h	22.344	23.764	25.273	26.875	28.525	30.176	31.827	33.478	35.128
2400 l/h	36.992	39.343	41.839	44.490	47.221	49.952	52.683	55.414	58.145
3000 l/h	54.696	58.171	61.860	65.779	69.814	73.850	77.885	81.921	85.957
3600 l/h	75.291	80.073	85.149	90.542	96.094	101.646	107.199	112.751	118.303
4200 l/h	98.649	104.912	111.562	118.626	125.897	133.169	140.440	147.712	154.984
4800 l/h	124.667	132.581	140.982	149.906	159.092	168.278	177.464	186.649	195.835