


Perte de pression **VARIO** Ø 40 jusqu'à PN20 double-U (2 circuits en parallèle) HakaGerodur
avec de l'eau à @ 15°C

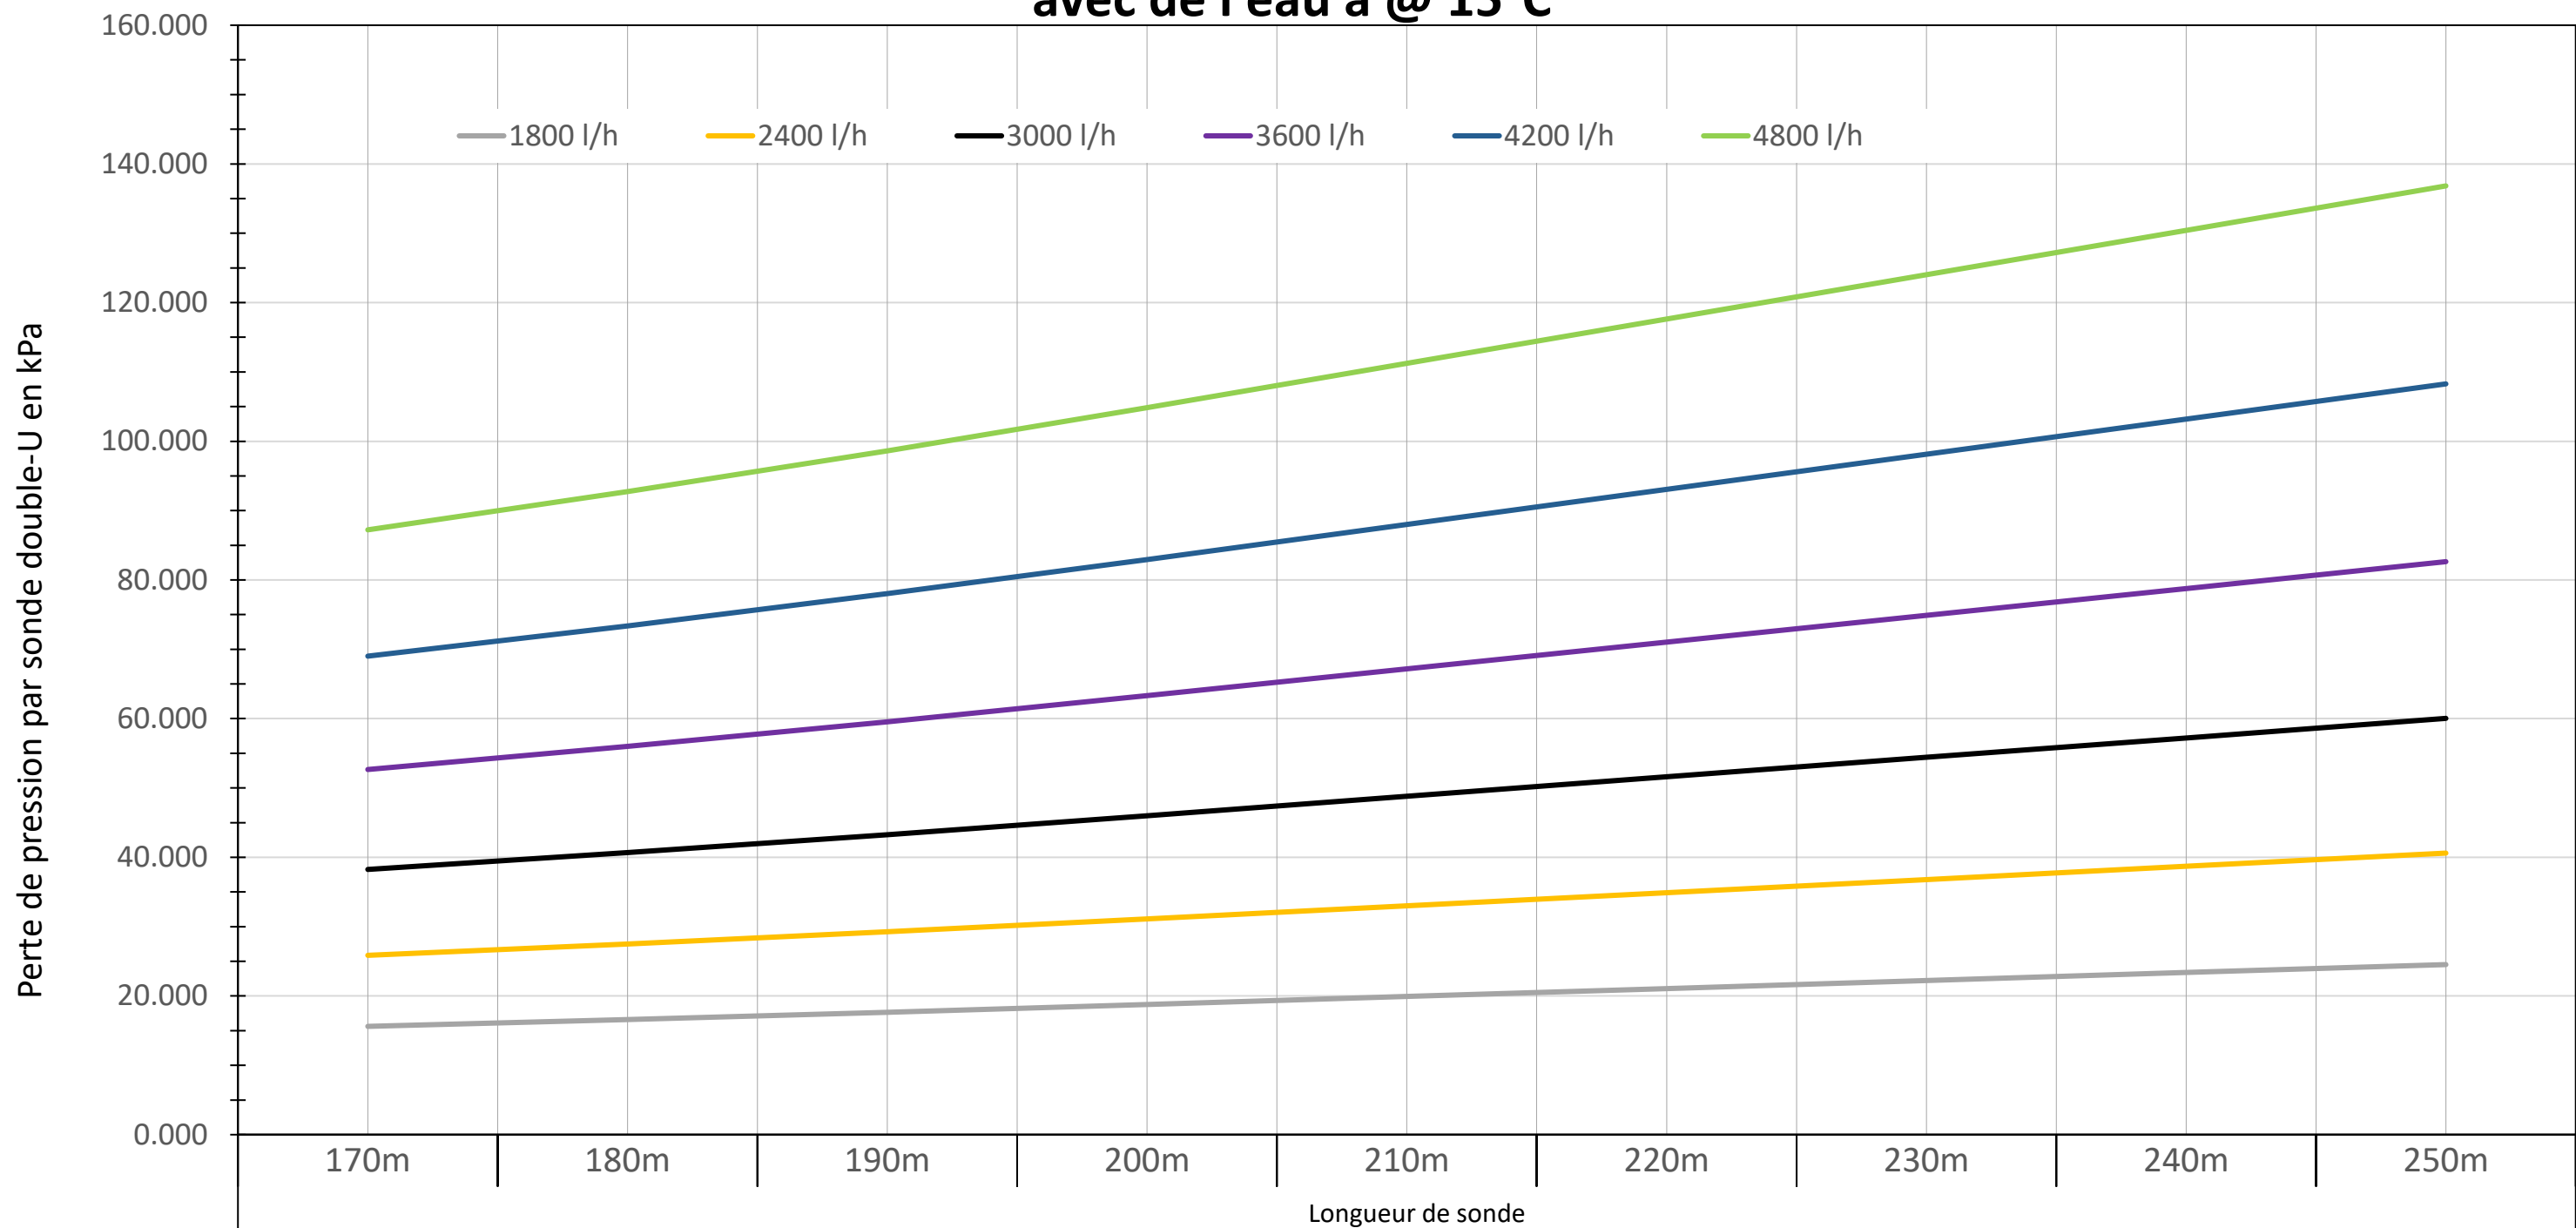

1800 l/h	15.618	16.609	17.661	18.778	19.928	21.078	22.227	23.377	24.527
2400 l/h	25.864	27.504	29.244	31.094	32.996	34.898	36.800	38.702	40.605
3000 l/h	38.250	40.674	43.247	45.981	48.792	51.603	54.414	57.224	60.035
3600 l/h	52.662	55.998	59.539	63.301	67.169	71.036	74.903	78.771	82.638
4200 l/h	69.011	73.381	78.020	82.948	88.013	93.078	98.143	103.207	108.272
4800 l/h	87.225	92.747	98.608	104.835	111.233	117.631	124.029	130.427	136.825