


Druckverlust DUPLEX Ø 50 PN20 doppel-U (2 Kreise parallel)
mit Ethylenglykol 25% @ 0°C

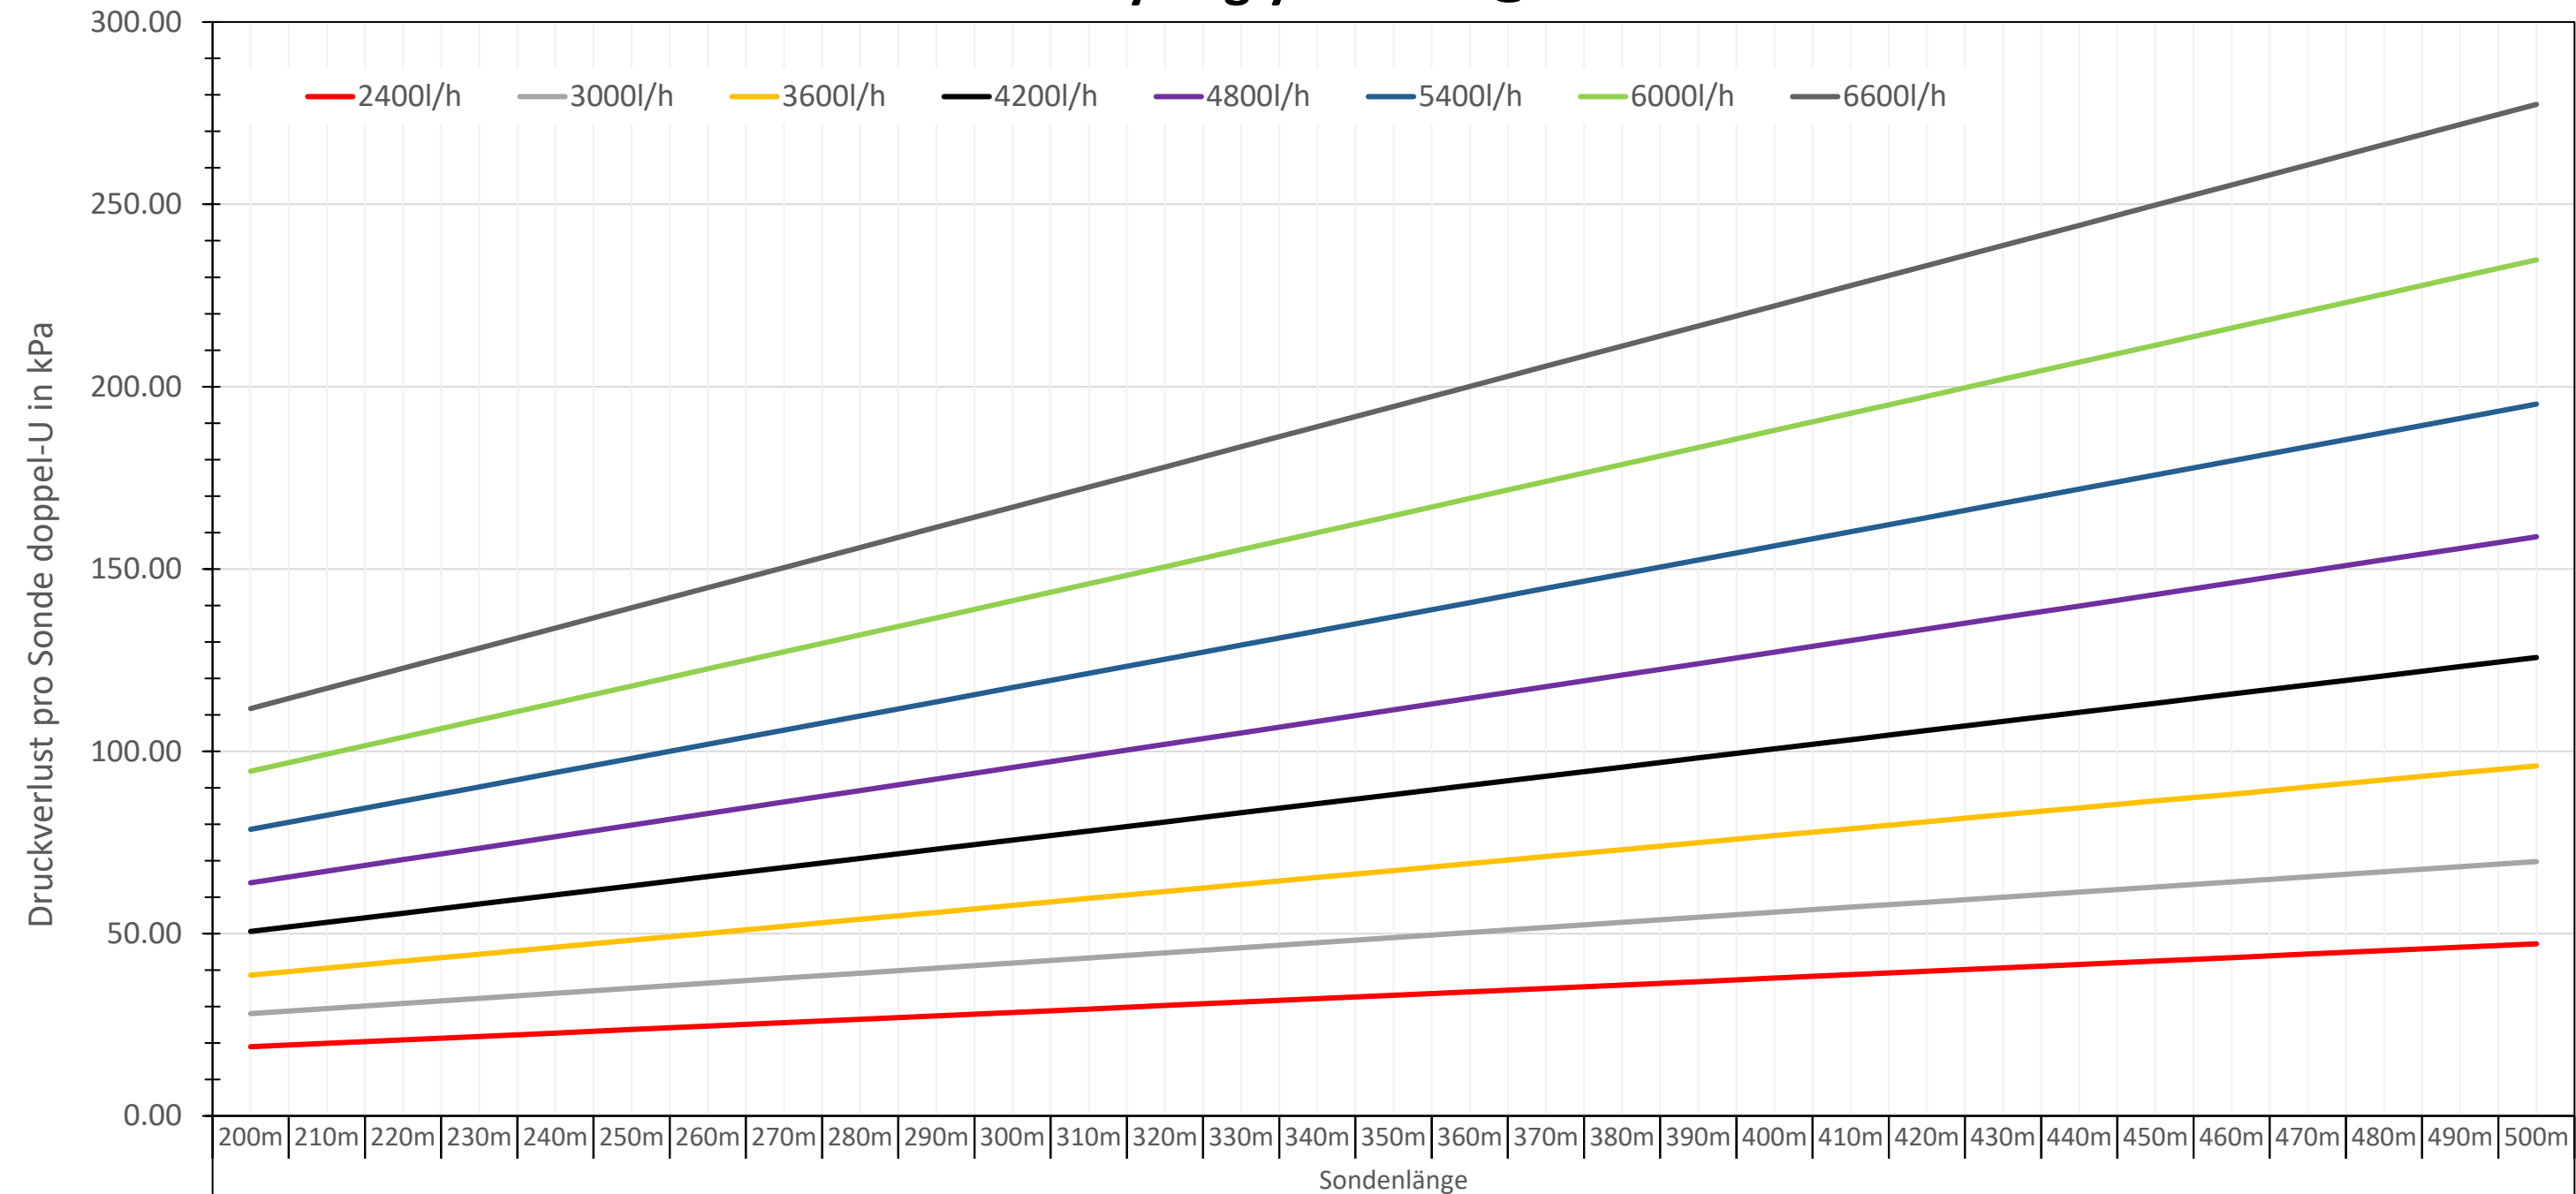

	200m	210m	220m	230m	240m	250m	260m	270m	280m	290m	300m	310m	320m	330m	340m	350m	360m	370m	380m	390m	400m	410m	420m	430m	440m	450m	460m	470m	480m	490m	500m
2400l/h	18.98	19.92	20.86	21.80	22.74	23.68	24.62	25.56	26.50	27.44	28.38	29.32	30.26	31.20	32.14	33.08	34.02	34.96	35.90	36.84	37.78	38.72	39.67	40.61	41.55	42.49	43.43	44.37	45.31	46.25	47.19
3000l/h	28.05	29.44	30.83	32.22	33.61	35.00	36.39	37.78	39.17	40.56	41.95	43.34	44.73	46.12	47.51	48.90	50.29	51.68	53.07	54.46	55.85	57.24	58.63	60.02	61.41	62.80	64.19	65.58	66.97	68.36	69.75
3600l/h	38.61	40.53	42.44	44.35	46.26	48.17	50.09	52.00	53.91	55.82	57.73	59.65	61.56	63.47	65.38	67.29	69.21	71.12	73.03	74.94	76.85	78.77	80.68	82.59	84.50	86.41	88.24	90.24	92.15	94.06	95.97
4200l/h	50.59	53.10	55.60	58.10	60.61	63.11	65.62	68.12	70.62	73.13	75.63	78.14	80.64	83.14	85.65	88.15	90.66	93.16	95.66	98.17	100.6	103.1	105.6	108.1	110.6	113.1	115.7	118.2	120.7	123.2	125.7
4800l/h	63.93	67.09	70.26	73.42	76.58	79.75	82.91	86.07	89.24	92.40	95.56	98.73	101.8	105.0	108.2	111.3	114.5	117.7	120.8	124.0	127.2	130.3	133.5	136.6	139.8	143.0	146.1	149.3	152.5	155.6	158.8
5400l/h	78.59	82.48	86.36	90.25	94.14	98.03	101.9	105.8	109.6	113.5	117.4	121.3	125.2	129.1	133.0	136.9	140.7	144.6	148.5	152.4	156.3	160.2	164.1	168.0	171.8	175.7	179.6	183.5	187.4	191.3	195.2
6000l/h	94.53	99.20	103.8	108.5	113.2	117.9	122.5	127.2	131.9	136.6	141.2	145.9	150.6	155.2	159.9	164.6	169.3	173.9	178.6	183.3	188.0	192.6	197.3	202.0	206.7	211.3	216.0	220.7	225.4	230.0	234.7
6600l/h	111.7	117.2	122.7	128.2	133.8	139.3	144.8	150.3	155.9	161.4	166.9	172.4	177.9	183.5	189.0	194.5	200.0	205.6	211.1	216.6	222.1	227.6	233.2	238.7	244.2	249.7	255.3	260.8	266.3	271.8	277.4